


**WR159 Waveguide Directional Cross Coupler, N Female Coupled Port,
RWDCC159N-40**
4.64-7.05GHz, Coupling 40dB, FDP58(UDR) Flange

Dimensions(mm) Tolerance±1%

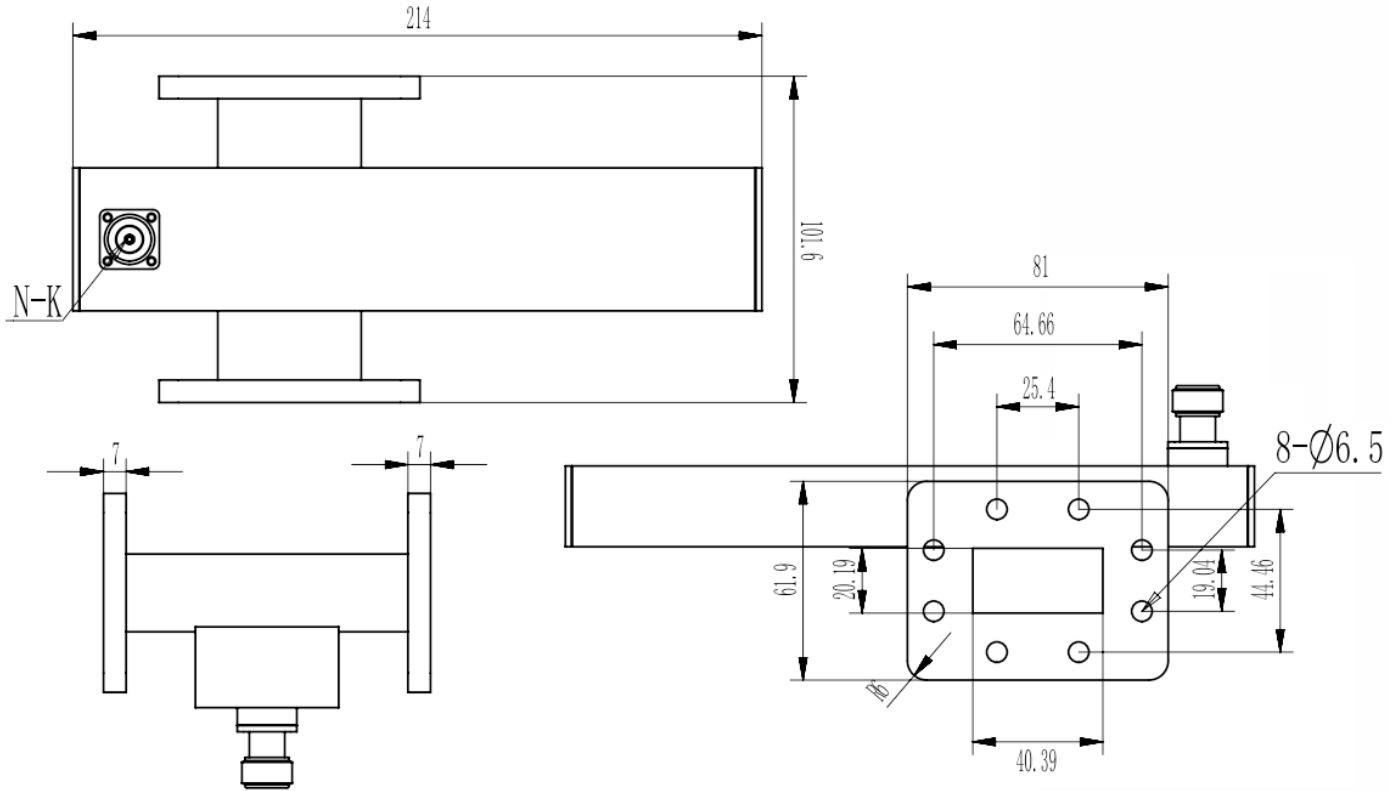

Electrical & Environmental

Frequency Range	4.64-7.05GHz	Impedance	50 Ohm
VSWR Primary	1.1 Max		
VSWR Secondary	1.25 Max		
Insertion Loss	dB Max		
Directivity	15dB Min		
Nominal Coupling	40±1.5dB		

Mechanical & Product Information

Product Number	RWDCC159N-40, P-Grade	Product Type	Waveguide Directional Cross Coupler
Waveguide	WR159(BJ58), FDP58(UDR) Flange	Waveguide Body	Aluminum, grey painted
Coupled Port	N Female	Connector Body	Passivated stainless steel
Center Contact	Aluminum, electric conductive oxidation		
Housing	Grey paint		
Dimensions	214(L)×101.6(W)mm	Net Weight	-



Microwave and Millimeter wave products
supplier

RFTOP® Technology Co., Ltd.
www.rftop.com service@rftop.com 86-755-88840350