


**WR650 Waveguide Directional Cross Coupler, N Female Coupled Port,
RWDCC650N-50**
1.13-1.73GHz, Coupling 50dB, FDP14(UDR) Flange

Dimensions(mm) Tolerance $\pm 1\%$

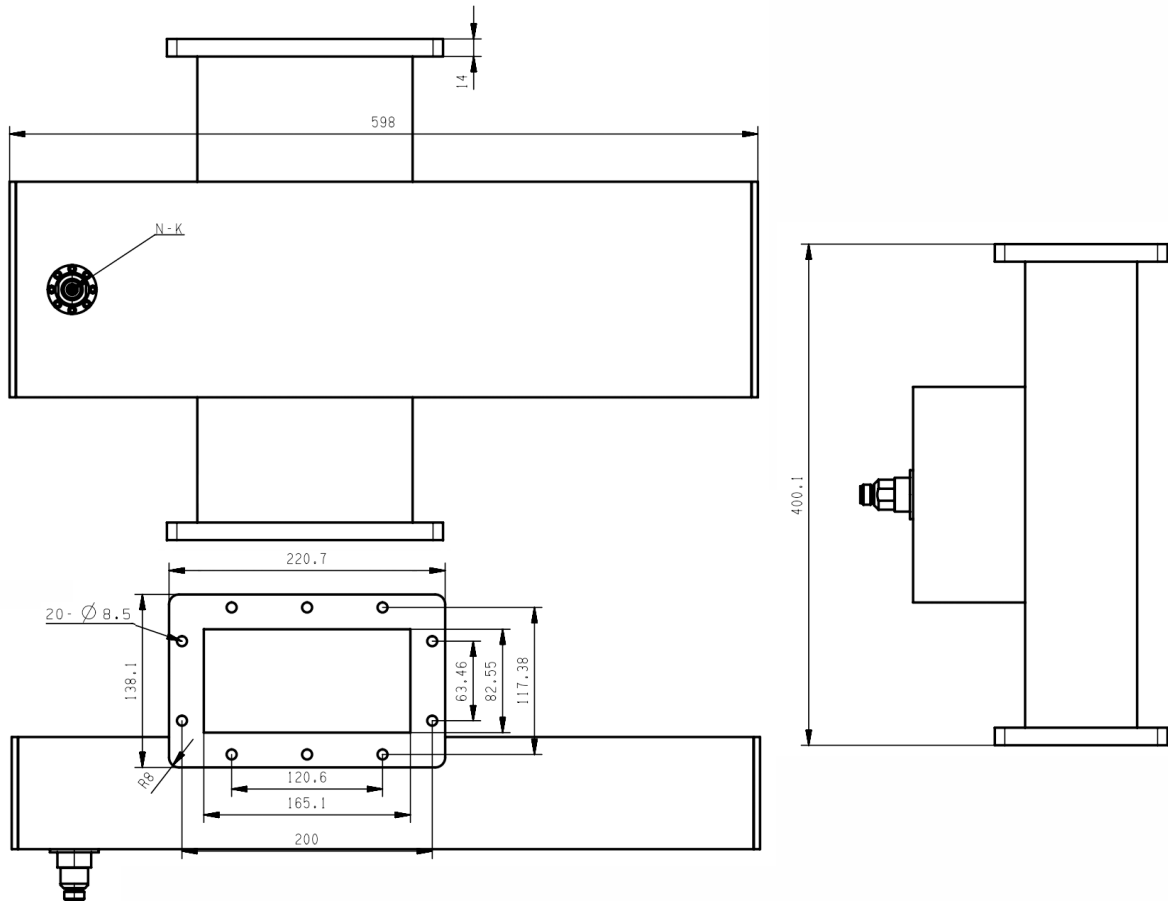

Electrical & Environmental

Frequency Range	1.13-1.73GHz	Impedance	50 Ohm
VSWR Primary	1.1 Max		
VSWR Secondary	1.3 Max		
Insertion Loss	dB Max		
Directivity	15dB Min		
Nominal Coupling	50 \pm 1.5dB		

Mechanical & Product Information

Product Number	RWDCC650N-50, P-Grade	Product Type	Waveguide Directional Cross Coupler
Waveguide	WR650(BJ14), FDP14(UDR) Flange	Waveguide Body	Aluminum, grey painted
Coupled Port	N Female	Connector Body	Passivated stainless steel
Center Contact	Aluminum, electric conductive oxidation		
Housing	Grey paint		
Dimensions	598(L)×400.1(W)mm	Net Weight	-



Microwave and Millimeter wave products
supplier

RFTOP® Technology Co., Ltd.
www.rftop.com service@rftop.com 86-755-88840350