


WR51 Waveguide Dual Directional Coupler, RWDCD51-50
14.5-22GHz, Coupling 50dB, FBP180(UBR) Flange

Dimensions(mm) Tolerance±1%

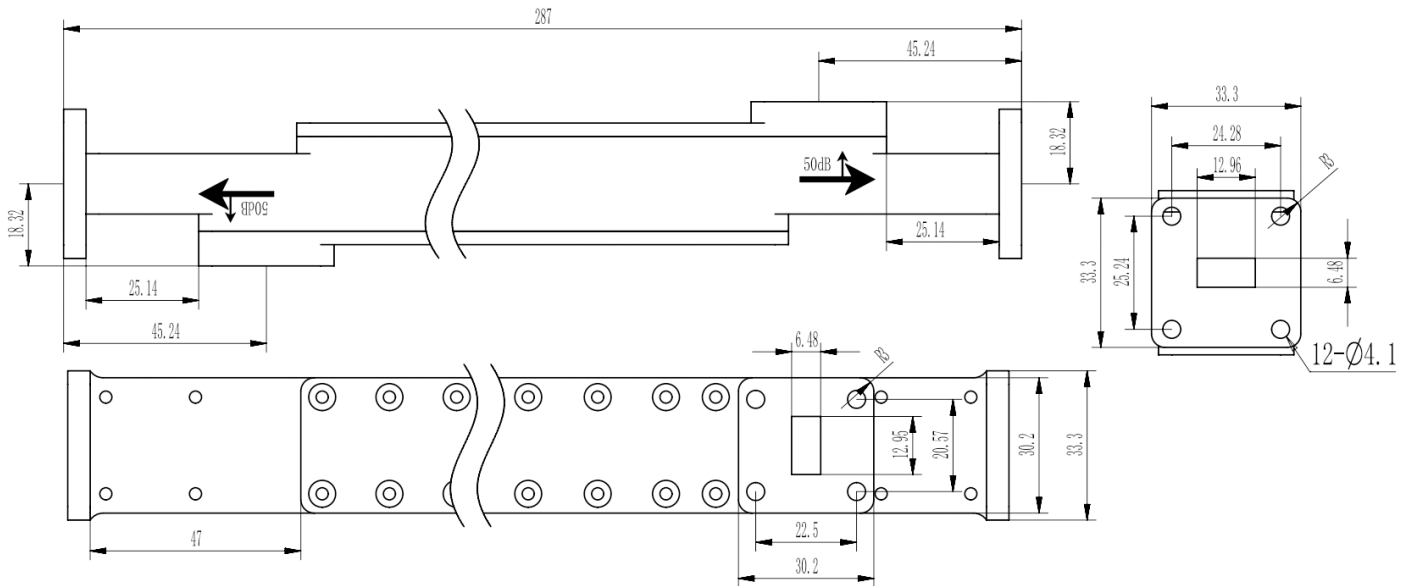

Electrical & Environmental

Frequency Range	14.5-22GHz	Impedance	50 Ohm
VSWR Primary	1.1 Max		
VSWR Secondary	1.25 Max		
Insertion Loss	dB Max		
Directivity	30dB Min		
Nominal Coupling	50±1.0dB		

Mechanical & Product Information

Product Number	RWDCD51-50, P-Grade	Product Type	Waveguide Dual Directional Coupler
Waveguide	WR51(BJ180), FBP180(UBR) Flange	Waveguide Body	Aluminum, grey painted
Center Contact	Aluminum, electric conductive oxidation		
Housing	Grey paint		
Dimensions	287×33.3×33.3mm	Net Weight	-