


**WR62 Waveguide Dual Directional Coupler, N Female Coupled Port,
RWDCD62N-40**
11.9-18GHz, Coupling 40dB, FBP140(UBR) Flange

Dimensions(mm) Tolerance±1%

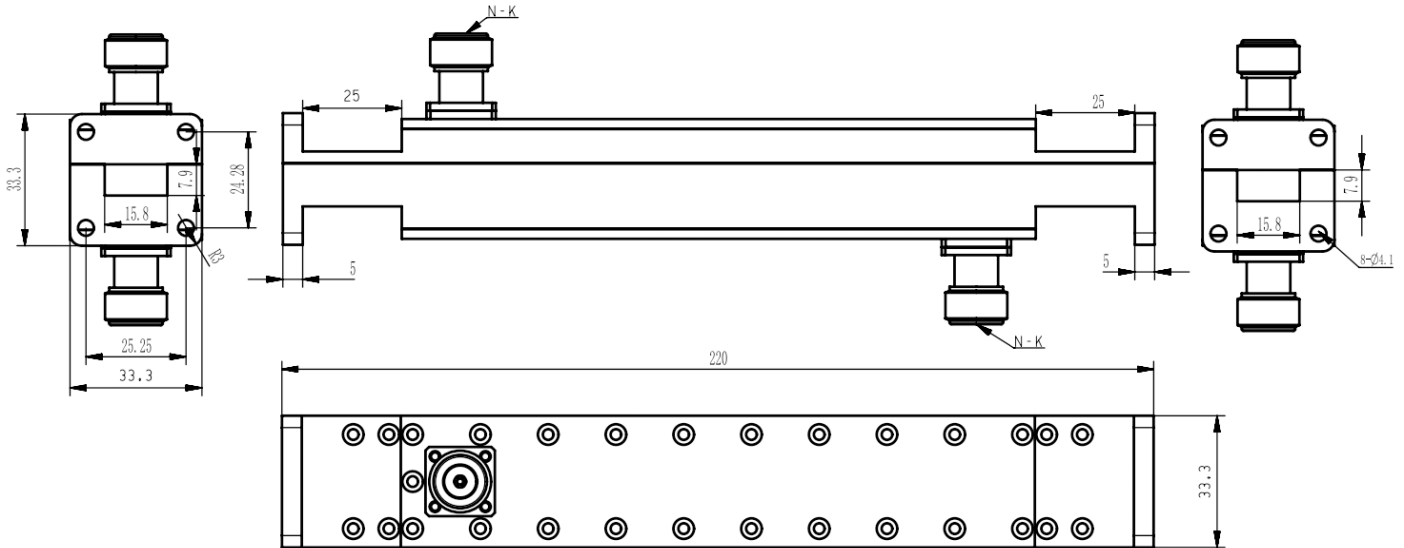

Electrical & Environmental

Frequency Range	11.9-18GHz	Impedance	50 Ohm
VSWR Primary	1.1 Max		
VSWR Secondary	1.3 Max		
Insertion Loss	0.2dB Max		
Directivity	25dB Min		
Nominal Coupling	40±1.0dB		

Mechanical & Product Information

Product Number	RWDCD62N-40, P-Grade	Product Type	Waveguide Dual Directional Coupler
Waveguide	WR62(BJ140), FBP140(UBR) Flange	Waveguide Body	Aluminum, grey painted
Coupled Port	N Female	Connector Body	Passivated stainless steel
Center Contact	Aluminum, electric conductive oxidation		
Housing	Grey paint		
Dimensions	220×33.3×33.3mm	Net Weight	-



Microwave and Millimeter wave products
supplier

RFTOP® Technology Co., Ltd.
www.rftop.com service@rftop.com 86-755-88840350