


WR22 Waveguide Dual Directional Cross Coupler, 2.4mm Female Coupled Port, RWDCDC22U15-40

32.9-50.1GHz, Coupling 40dB, FUGP400 Circular Flange

Dimensions(mm) Tolerance $\pm 1\%$

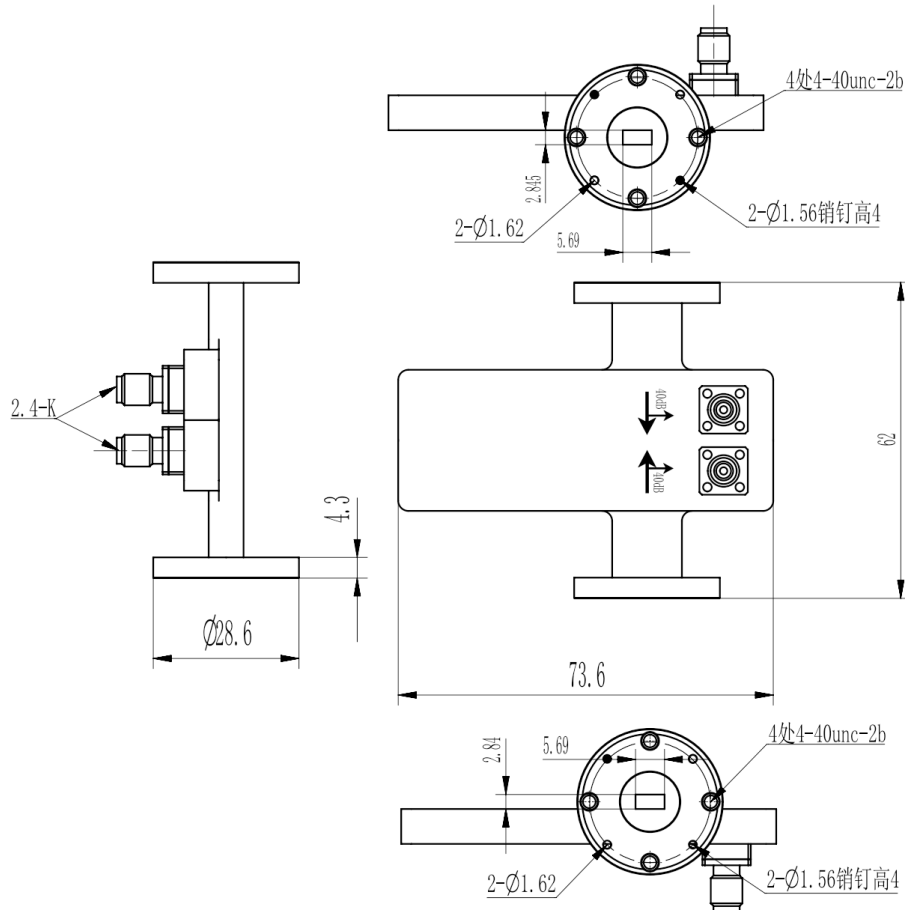

Electrical & Environmental

Frequency Range	32.9-50.1GHz	Impedance	50 Ohm
VSWR Primary	1.1 Max		
VSWR Secondary	1.4 Max		
Insertion Loss	dB Max		
Directivity	15dB Min		
Nominal Coupling	40 \pm 1.5dB		

Mechanical & Product Information

Product Number	RWDCDC22U15-40, P-Grade	Product Type	Waveguide Dual Directional Cross Coupler
Waveguide	WR22(BJ400), FUGP400 Circular Flange	Waveguide Body	Copper, gold plated
Coupled Port	2.4mm Female	Connector Body	Passivated stainless steel
Center Contact	Copper, gold plated		
Housing	Copper, gold plated		
Dimensions	73.6×62×28.6mm	Net Weight	-



Microwave and Millimeter wave products
supplier

RFTOP® Technology Co., Ltd.
www.rftop.com service@rftop.com 86-755-88840350