


**WR28 Waveguide Dual Directional Cross Coupler, 2.92mm Female
Coupled Port, RWDCDC28K-20
26.3-40GHz, Coupling 20dB, FBP320(UBR) Flange**

Dimensions(mm) Tolerance±1%

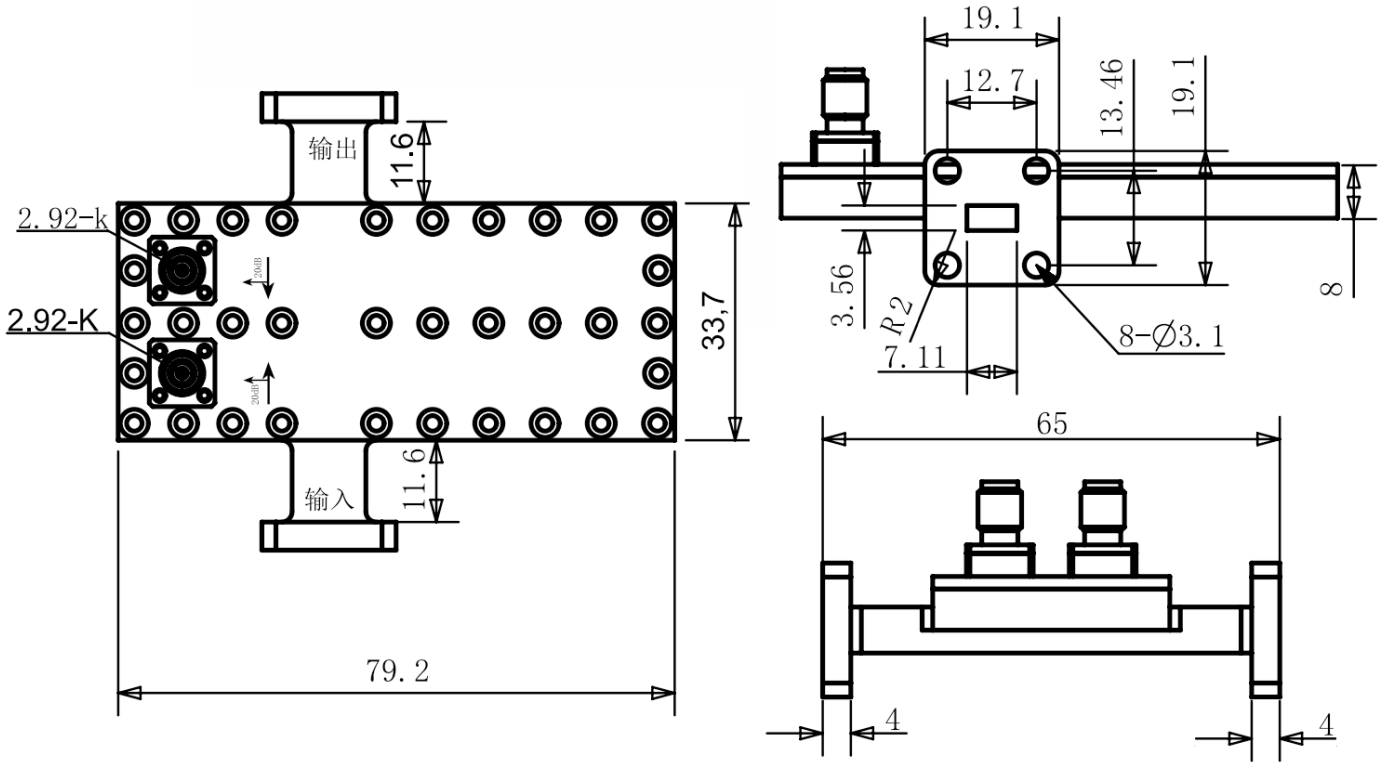

Electrical & Environmental

Frequency Range	26.3-40GHz	Impedance	50 Ohm
VSWR Primary	1.1 Max		
VSWR Secondary	1.3 Max		
Insertion Loss	dB Max		
Directivity	15dB Min		
Nominal Coupling	20±1.0dB		

Mechanical & Product Information

Product Number	RWDCDC28K-20, P-Grade	Product Type	Waveguide Dual Directional Cross Coupler
Waveguide	WR28(BJ320), FBP320(UBR) Flange	Waveguide Body	Aluminum, grey painted
Coupled Port	2.92mm Female	Connector Body	Passivated stainless steel
Center Contact	Aluminum, electric conductive oxidation		
Housing	Grey paint		
Dimensions	79.2(L)×65(W)mm	Net Weight	-



Microwave and Millimeter wave products
supplier

RFTOP® Technology Co., Ltd.
www.rftop.com service@rftop.com 86-755-88840350