


WR340 Dual Directional Waveguide Coupler, RWDCDR340N-50 2.4-2.5GHz, Coupling 50dB, UDR26 Flange

Dimensions(mm) Tolerance $\pm 1\%$

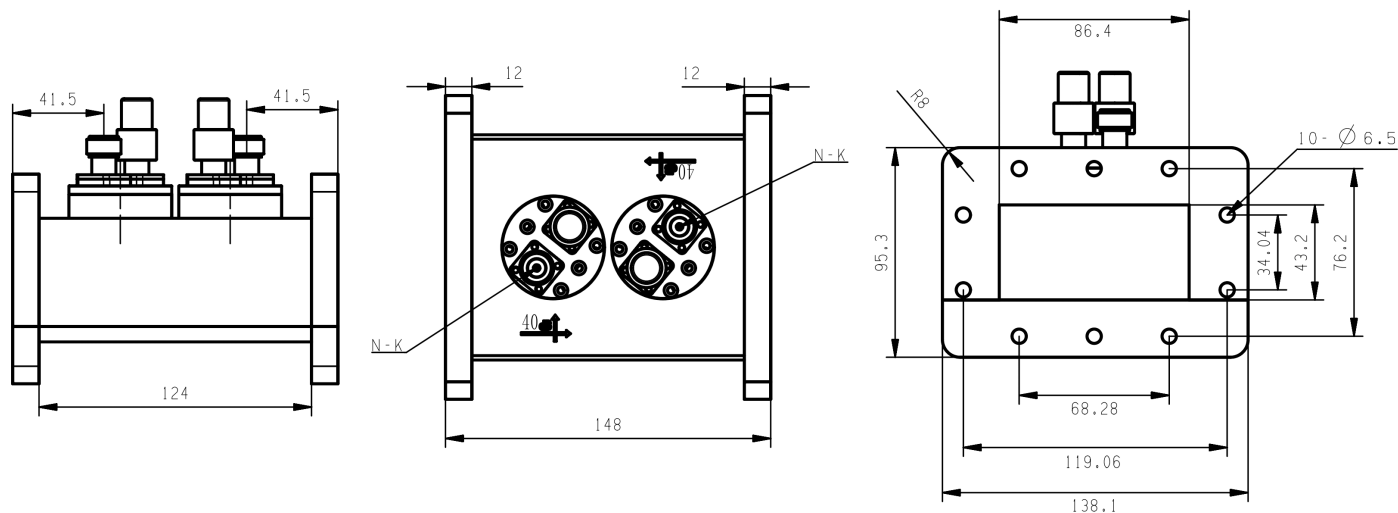

Electrical & Environmental

Frequency Range	2.4-2.5GHz	Impedance	50 Ohm
VSWR Primary	1.1 Max		
VSWR Secondary	1.2 Max		
Nominal Coupling	50 $\pm$ 0.5dB		
Directivity	22dB Min		

Mechanical & Product Information

Product Number	RWDCDR340N-50, P-Grade, Ring Coupling	Product Type	Waveguide Coupler
Coupled Port	N Female	Connector Body	Passivated stainless steel
Waveguide	WR340(BJ26), UDR26 Flange	Waveguide Body	Aluminum, grey painted
Center Contact	Aluminum, electric conductive oxidation		
Housing	Grey paint		
Dimensions	148(L) $\times$ 138.1(W) $\times$ 95.3(H)mm	Net Weight	-