


WR770 Dual Directional Waveguide Coupler, RWDCDR770N03-30

1.3-1.4GHz, Coupling 30dB, UDR12 Flange

Dimensions(mm) Tolerance $\pm 1\%$

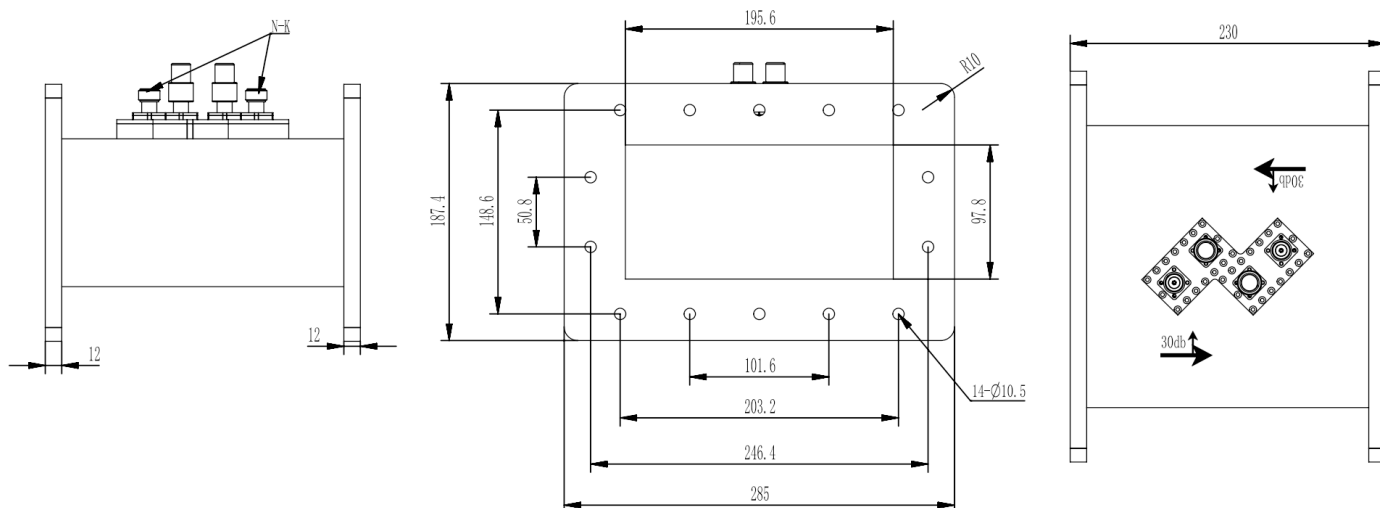

Electrical & Environmental

Frequency Range	1.3-1.4GHz	Impedance	50 Ohm
VSWR Primary	1.1 Max		
VSWR Secondary	1.3 Max		
Nominal Coupling	30 ± 0.5 dB		
Directivity	20dB Min		

Mechanical & Product Information

Product Number	RWDCDR770N03-30, P-Grade, Ring Coupling	Product Type	Waveguide Coupler
Coupled Port	N Female	Connector Body	Passivated stainless steel
Waveguide	WR770(BJ12), UDR12 Flange	Waveguide Body	Aluminum, grey painted
Center Contact	Aluminum, electric conductive oxidation		
Housing	Grey paint		
Dimensions	230(L)*285(W)*187.4(H)mm	Net Weight	-