


WRD250 Double Ridge Waveguide Directional Coupler, N Female Coupled Port, RWDDC250N-60

2.6-7.8GHz, Coupling 60dB, FPWRD250 Rectangular Flange

Dimensions(mm) Tolerance $\pm 1\%$

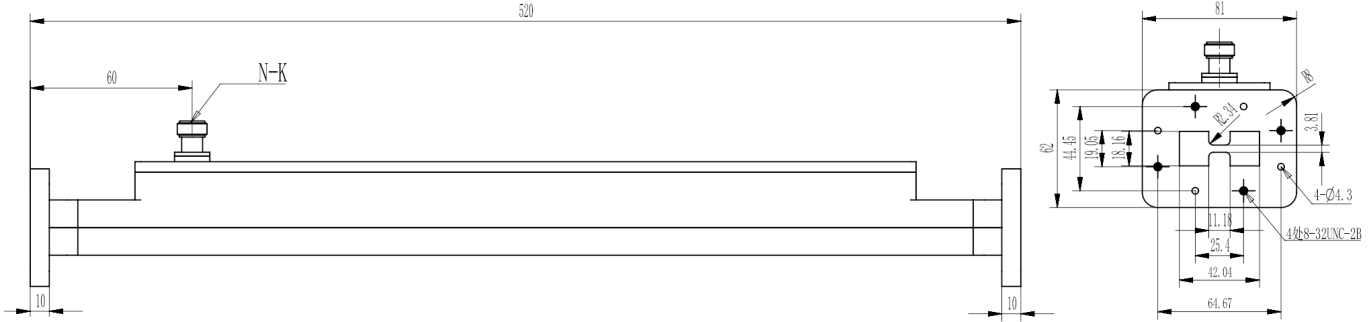

Electrical & Environmental

Frequency Range	2.6-7.8GHz	Impedance	50 Ohm
VSWR Primary	1.1 Max		
VSWR Secondary	1.3 Max		
Insertion Loss	dB Max		
Directivity	20dB Min		
Nominal Coupling	60 \pm 1.5dB		

Mechanical & Product Information

Product Number	RWDDC250N-60, P-Grade	Product Type	Double Ridge Waveguide Directional Coupler
Waveguide	WRD250, FPWRD250 Rectangular Flange	Waveguide Body	Aluminum, grey painted
Coupled Port	N Female	Connector Body	Passivated stainless steel
Center Contact	Aluminum, electric conductive oxidation		
Housing	Grey paint		
Dimensions	520(L) \times 81(W) \times 62(H)mm	Net Weight	-



Microwave and Millimeter wave products
supplier

RFTOP® Technology Co., Ltd.
www.rftop.com service@rftop.com 86-755-88840350