


WRD350 Double Ridge Waveguide Directional Coupler, N Female Coupled Port, RWDDC350N-60
3.5-8.2GHz, Coupling 60dB, FPWRD350 Rectangular Flange

Dimensions(mm) Tolerance±1%

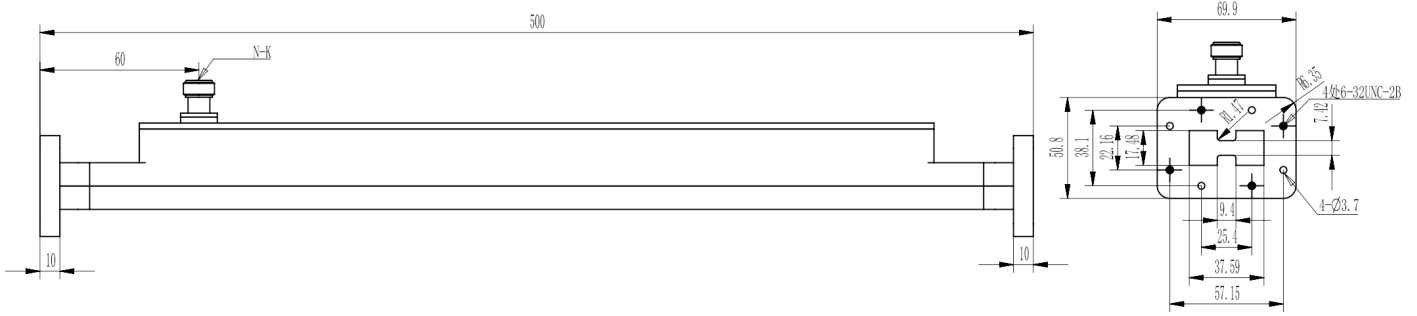

Electrical & Environmental

Frequency Range	3.5-8.2GHz	Impedance	50 Ohm
VSWR Primary	1.1 Max		
VSWR Secondary	1.3 Max		
Insertion Loss	dB Max		
Directivity	20dB Min		
Nominal Coupling	60±1.5dB		

Mechanical & Product Information

Product Number	RWDDC350N-60, P-Grade	Product Type	Double Ridge Waveguide Directional Coupler
Waveguide	WRD350, FPWRD350 Rectangular Flange	Waveguide Body	Aluminum, grey painted
Coupled Port	N Female	Connector Body	Passivated stainless steel
Center Contact	Aluminum, electric conductive oxidation		
Housing	Grey paint		
Dimensions	500(L)×69.9(W)×50.8(H)mm	Net Weight	-



Microwave and Millimeter wave products
supplier

RFTOP® Technology Co., Ltd.
www.rftop.com service@rftop.com 86-755-88840350