


2.92mm(K,SK) Female to 2.92mm(K,SK) Female Inner DC Block, RB0140FF

5MHz-40GHz, 60V



Dimensions(mm) Tolerance $\pm 1\%$

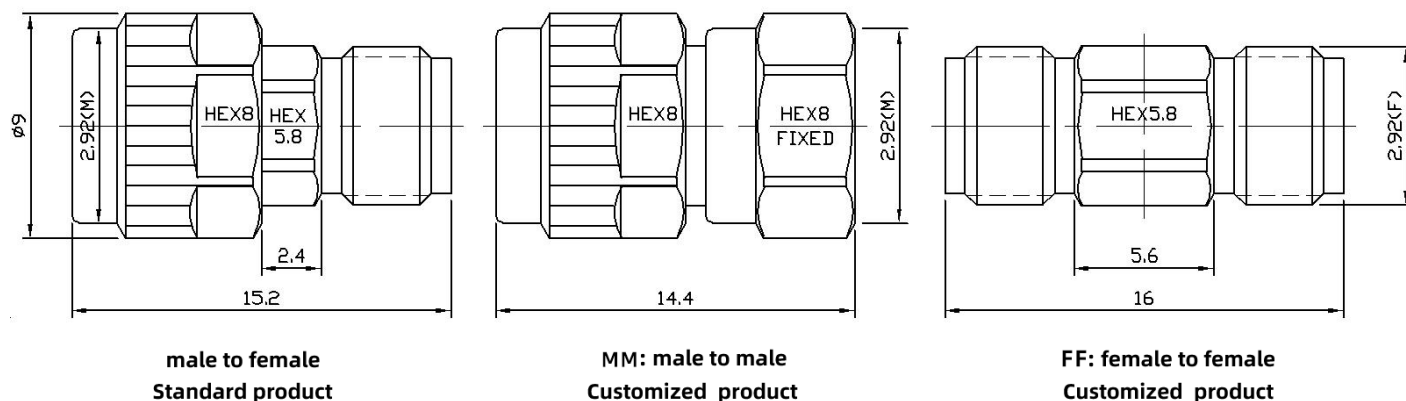

Electrical & Environmental

Frequency Range	5MHz-40GHz	Impedance	50 Ohm
VSWR	1.35 Max	Insertion Loss	0.5 dB Max
Voltage	60 Volts Max	Avg Power	2 Watts Max @25°C

Mechanical & Product Information

Product Number	RB0140FF, U-Grade	Connector	2.92mm(K,SK) Female to 2.92mm(K,SK) Female
Connector Body	Passivated stainless steel	Center Contact	1.27 μ m Gold plated beryllium copper
Net Weight	About 2.1g	RoHS	Compliant

Typical Test Data

