


2.92mm(K,SK) Male to 2.92mm(K,SK) Female Inner DC Block, RB0140 5MHz-40GHz, 60V



Dimensions(mm) Tolerance $\pm 1\%$

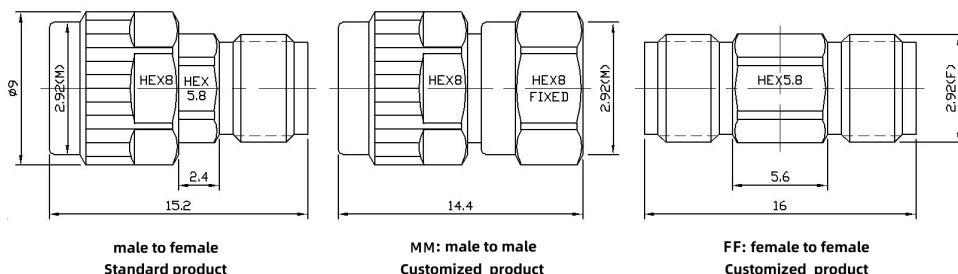

Product Selection, Customizable		
RFTOP P/N	Grade	VSWR
RB0140	Standard	≤ 1.35
RB0140-B	B	≤ 1.25
RB0140-A	A	≤ 1.15

Electrical & Environmental

Frequency Range	5MHz-40GHz	Impedance	50 Ohm
VSWR	1.35 Max	Insertion Loss	0.5 dB Max
Voltage	60 Volts Max	Avg Power	2 Watts Max @25°C

Mechanical & Product Information

Product Number	RB0140, U-Grade	Connector	2.92mm(K,SK) Male to 2.92mm(K,SK) Female
Connector Body	Passivated stainless steel	Center Contact	1.27 μ m Gold plated beryllium copper
Net Weight	About 3.5g	RoHS	Compliant

Typical Test Data

