




## 2.4mm Male to 2.4mm Female Inner DC Block, RB0150 10MHz-50GHz, 60V

### Dimensions(mm) Tolerance $\pm 1\%$

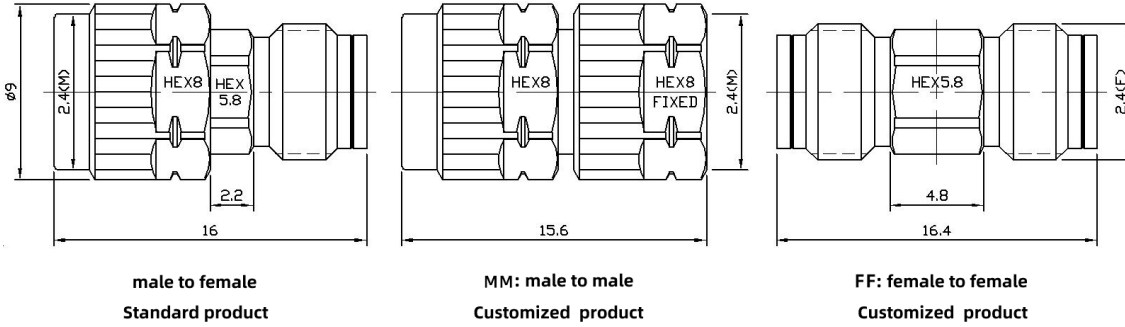

Product Grade	
Grade	VSWR
Standard	1.35 max
Level B	1.30 max
Level A	1.25 max

### Electrical & Environmental

Frequency Range	10MHz-50GHz	Impedance	50 Ohm
VSWR	1.35 Max	Insertion Loss	0.6 dB Max
Voltage	60 Volts Max	Input Avg Power	2 Watts Max @25°C

### Mechanical & Product Information

Product Number	RB0150, JP-Grade	Connector	2.4mm Male to 2.4mm Female
Connector Body	Passivated stainless steel	Center Contact	1.27um Gold plated beryllium copper
Net Weight	About 3.5g	RoHS	Compliant

### Typical Test Data

