




N Male to N Female Inner DC Block, RB08N050

10MHz-8GHz, 50V

Dimensions(mm) Tolerance $\pm 1\%$

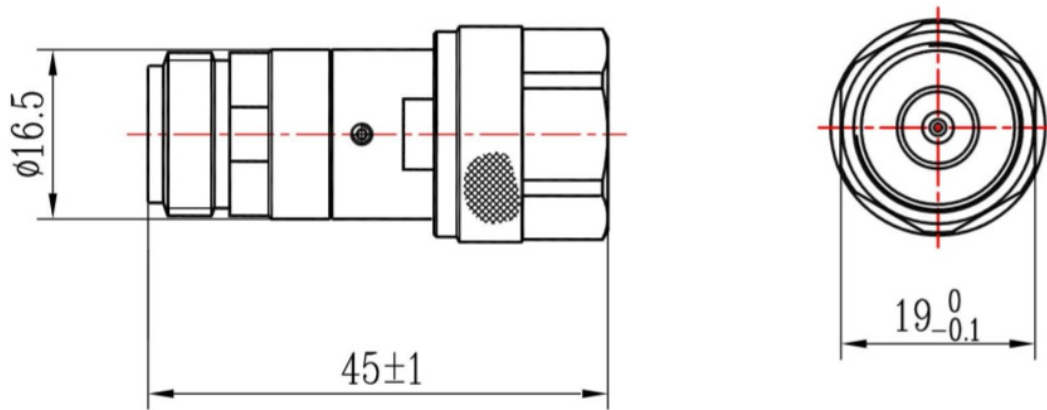

Electrical & Environmental

Frequency Range	10MHz-8GHz	Impedance	50 Ohm
VSWR	1.2 Max	Insertion Loss	0.4 dB Max
Voltage	50 Volts Max	Input Avg Power	2 Watts Max @25°C

Mechanical & Product Information

Product Number	RB08N050, H-Grade	Connector	N Male to N Female
Connector Body	Ternary alloy plated brass	Center Contact	Gold plated brass, Gold plated beryllium copper
Net Weight	About 50.0g	RoHS	Compliant

Typical Test Data

