




## N Male to N Female Inner DC Block, RB08N250

10MHz-8GHz, 250V

### Dimensions(mm) Tolerance $\pm 1\%$

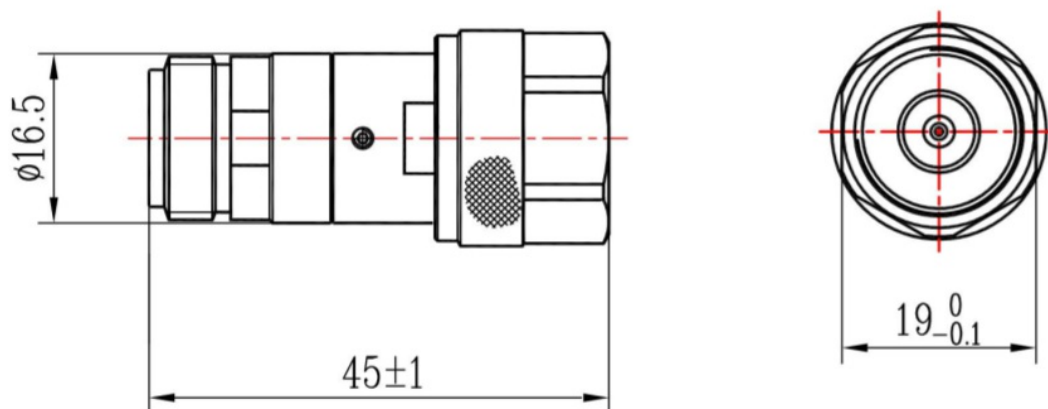

### Electrical & Environmental

|                 |               |                 |                   |
|-----------------|---------------|-----------------|-------------------|
| Frequency Range | 10MHz-8GHz    | Impedance       | 50 Ohm            |
| VSWR            | 1.2 Max       | Insertion Loss  | 0.4 dB Max        |
| Voltage         | 250 Volts Max | Input Avg Power | 2 Watts Max @25°C |

### Mechanical & Product Information

|                |                            |                |                                                 |
|----------------|----------------------------|----------------|-------------------------------------------------|
| Product Number | RB08N250, H-Grade          | Connector      | N Male to N Female                              |
| Connector Body | Ternary alloy plated brass | Center Contact | Gold plated brass, Gold plated beryllium copper |
| Net Weight     | About 50.0g                | RoHS           | Compliant                                       |

### Typical Test Data

