




Inner DC Block 3.5mm Male to Female RB27Q60 10MHz-26.5GHz, 60V

Dimensions(mm) Tolerance±1%

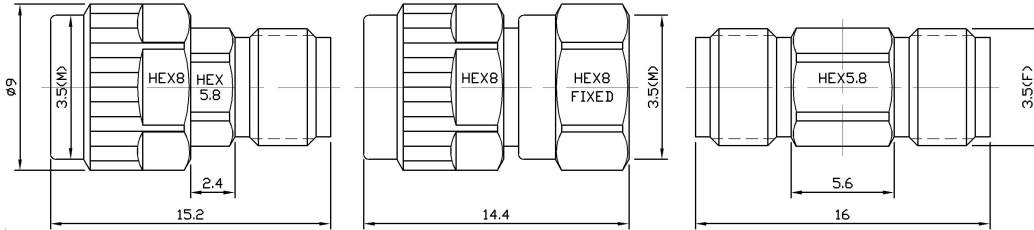

Electrical & Environmental

Frequency Range	10MHz-26.5GHz	Impedance	50 Ohm
VSWR	1.2 Max	Insertion Loss	-
Input Avg Power	3 Watts Max @25°C (Derate linearly to 0.3 Watt at 100°C), -55°C~100°C		
Voltage	60 Volts Max		

Mechanical

RF Connector	3.5mm Male to Female		
Connector Body	Passivated stainless steel	Center Contact	1.27um Gold plated beryllium copper
Net Weight	About 3.5g	RoHS	Compliant

Typical Test Data

