




SMA Female to SMA Female Inner DC Block, **RB27S050FF** 10MHz-26.5GHz, 50V

Dimensions(mm) Tolerance $\pm 1\%$

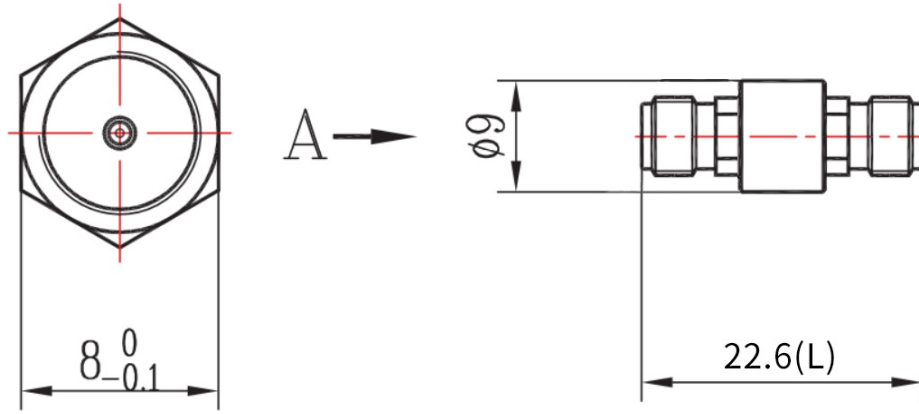

Electrical & Environmental

Frequency Range	10MHz-26.5GHz	Impedance	50 Ohm
VSWR	1.3 Max	Insertion Loss	0.6 dB Max
Voltage	50 Volts Max	Input Avg Power	2 Watts Max @25°C

Mechanical & Product Information

Product Number	RB27S050FF, H-Grade	Connector	SMA Female to SMA Female
Connector Body	Passivated stainless steel	Center Contact	Gold plated brass, Gold plated beryllium copper
Net Weight	About 4.0g	RoHS	Compliant

Typical Test Data

