




## N Male to N Female Inner DC Block, RBD18N50

300KHz-18GHz, 50V

### Dimensions(mm) Tolerance $\pm 1\%$

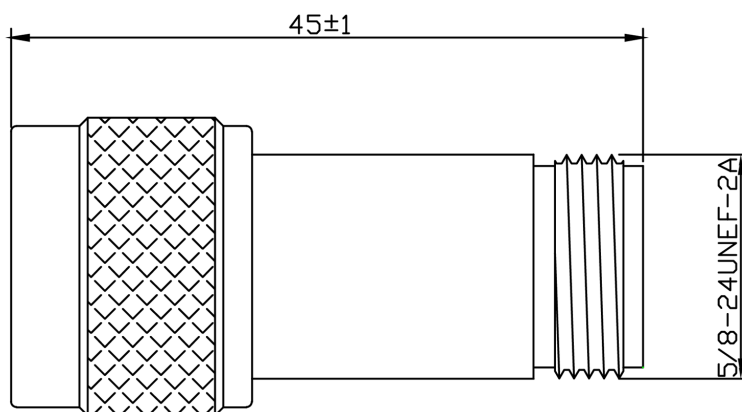

### Electrical & Environmental

|                 |              |                 |            |
|-----------------|--------------|-----------------|------------|
| Frequency Range | 300KHz-18GHz | Impedance       | 50 Ohm     |
| VSWR            | 1.4 Max      | Insertion Loss  | 1.0 dB Max |
| Voltage         | 50 Volts Max | Input Avg Power | -          |

### Mechanical & Product Information

|                |                     |                |                                           |
|----------------|---------------------|----------------|-------------------------------------------|
| Product Number | RBD18N50, E-Grade   | Connector      | N Male to N Female                        |
| Connector Body | Nickel plated brass | Center Contact | Gold plated brass, Gold plated Tin bronze |
| Net Weight     | -                   | RoHS           | Compliant                                 |

### Typical Test Data

