




SMA Male to SMA Female Inner DC Block, RBD18S50

300KHz-18GHz, 50V

Dimensions(mm) Tolerance $\pm 1\%$

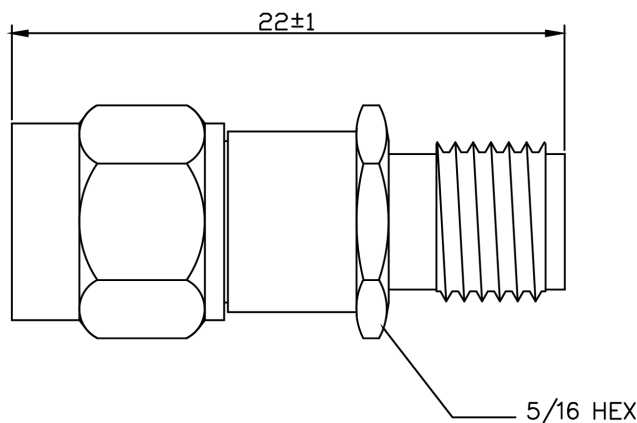

Electrical & Environmental

Frequency Range	300KHz-18GHz	Impedance	50 Ohm
VSWR	1.35 Max	Insertion Loss	0.7 dB Max
Voltage	50 Volts Max	Input Avg Power	-

Mechanical & Product Information

Product Number	RBD18S50, E-Grade	Connector	SMA Male to SMA Female
Connector Body	Passivated stainless steel,303	Center Contact	Gold plated beryllium copper
Net Weight	-	RoHS	Compliant

Typical Test Data

