




SMA Male to SMA Female Inner DC Block, RBD27S50

300KHz-26.5GHz, 50V

Dimensions(mm) Tolerance $\pm 1\%$

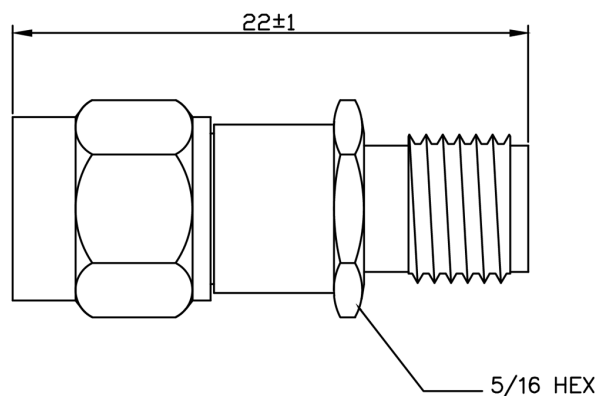

Electrical & Environmental

Frequency Range	300KHz-26.5GHz	Impedance	50 Ohm
VSWR	1.5 Max	Insertion Loss	1.5 dB Max (18-26.5GHz); 0.7dB max (0.0003-18GHz)
Voltage	50 Volts Max	Input Avg Power	-

Mechanical & Product Information

Product Number	RBD27S50, E-Grade	Connector	SMA Male to SMA Female
Connector Body	Passivated stainless steel,303	Center Contact	Gold plated beryllium copper
Net Weight	-	RoHS	Compliant

Typical Test Data

