




SMA Male to SMA Female Inner DC Block, **RBK18S50** 9KHz-18GHz, 50V

Dimensions(mm) Tolerance $\pm 1\%$

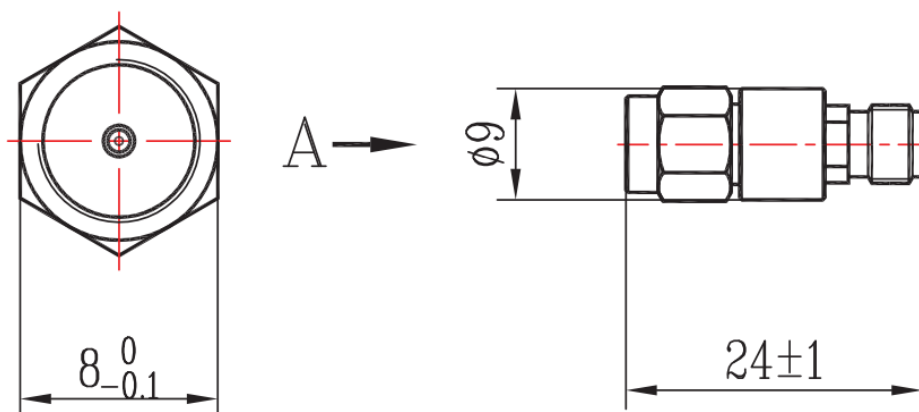

Electrical & Environmental

Frequency Range	9KHz-18GHz	Impedance	50 Ohm
VSWR	1.3 Max	Insertion Loss	0.9 dB Max
Voltage	50 Volts Max	Input Avg Power	2 Watts Max @25°C

Mechanical & Product Information

Product Number	RBK18S50, H-Grade	Connector	SMA Male to SMA Female
Connector Body	Passivated stainless steel	Center Contact	Gold plated brass, Gold plated beryllium copper
Net Weight	About 5.0g	RoHS	Compliant

Typical Test Data

