




SSMA Male to SSMA Female Inner DC Block, RBK18SA50 9KHz-18GHz, 50V

Dimensions(mm) Tolerance $\pm 1\%$

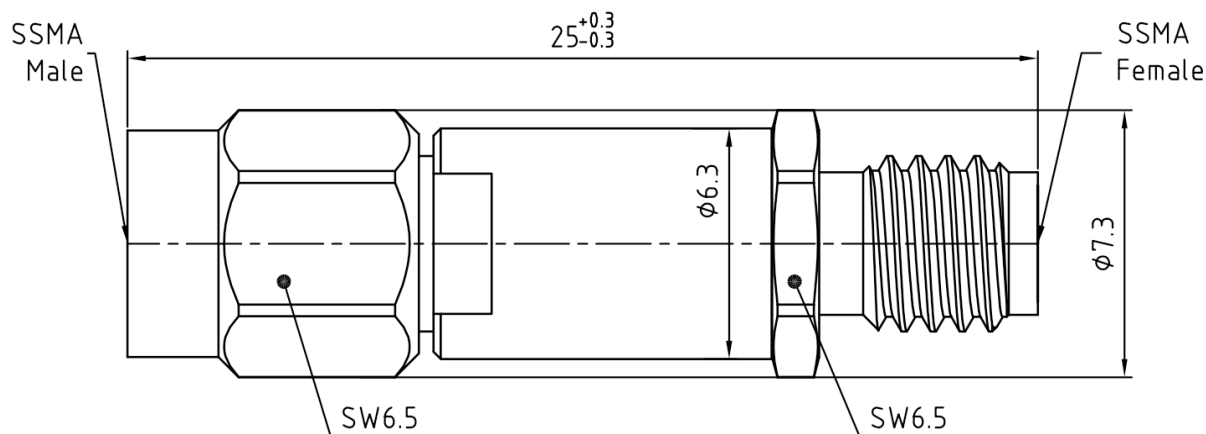

Electrical & Environmental

Frequency Range	9KHz-18GHz	Impedance	50 Ohm
VSWR	1.35 Max	Insertion Loss	0.6 dB Max
Voltage	50 Volts Max	Input Avg Power	-

Mechanical & Product Information

Product Number	RBK18SA50, H-Grade	Connector	SSMA Male to SSMA Female
Connector Body	Passivated stainless steel, Gold plated brass, Gold plated beryllium copper	Center Contact	Gold plated brass, Gold plated beryllium copper
Net Weight	-	RoHS	Compliant

Typical Test Data

