




SMA Male to SMA Male Inner DC Block, **RBK27S100MML**  
 9KHz-26.5GHz, 100V

Dimensions(mm) Tolerance±1%

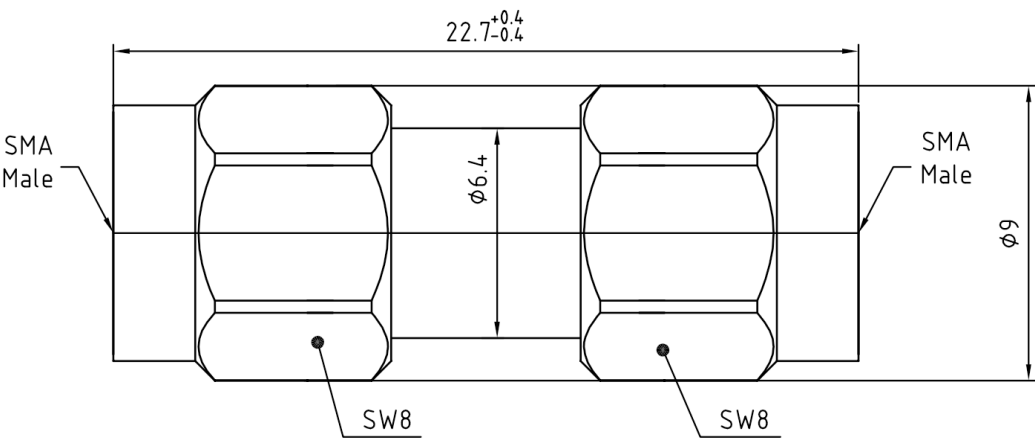

Electrical & Environmental

|                 |               |                 |            |
|-----------------|---------------|-----------------|------------|
| Frequency Range | 9KHz-26.5GHz  | Impedance       | 50 Ohm     |
| VSWR            | 1.35 Max      | Insertion Loss  | 0.8 dB Max |
| Voltage         | 100 Volts Max | Input Avg Power | -          |

Mechanical & Product Information

|                |                            |                |                      |
|----------------|----------------------------|----------------|----------------------|
| Product Number | RBK27S100MML, H-Grade      | Connector      | SMA Male to SMA Male |
| Connector Body | Passivated stainless steel | Center Contact | Gold plated brass    |
| Net Weight     | About 5.0g                 | RoHS           | Compliant            |

Typical Test Data