




SMA Male to SMA Female Inner DC Block, **RBK27S50L** 9KHz-26.5GHz, 50V

Dimensions(mm) Tolerance $\pm 1\%$

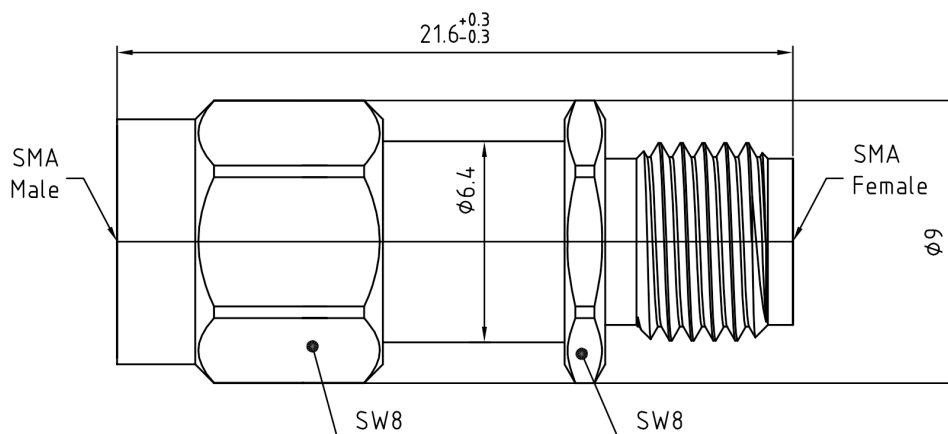

Electrical & Environmental

Frequency Range	9KHz-26.5GHz	Impedance	50 Ohm
VSWR	1.35 Max	Insertion Loss	0.8 dB Max
Voltage	50 Volts Max	Input Avg Power	-

Mechanical & Product Information

Product Number	RBK27S50L, H-Grade	Connector	SMA Male to SMA Female
Connector Body	Passivated stainless steel	Center Contact	Gold plated brass, Gold plated beryllium copper
Net Weight	About 4.2g	RoHS	Compliant

Typical Test Data

