




SMA Male to SMA Male Inner DC Block, RBK27S50MML 9KHz-26.5GHz, 50V

Dimensions(mm) Tolerance $\pm 1\%$

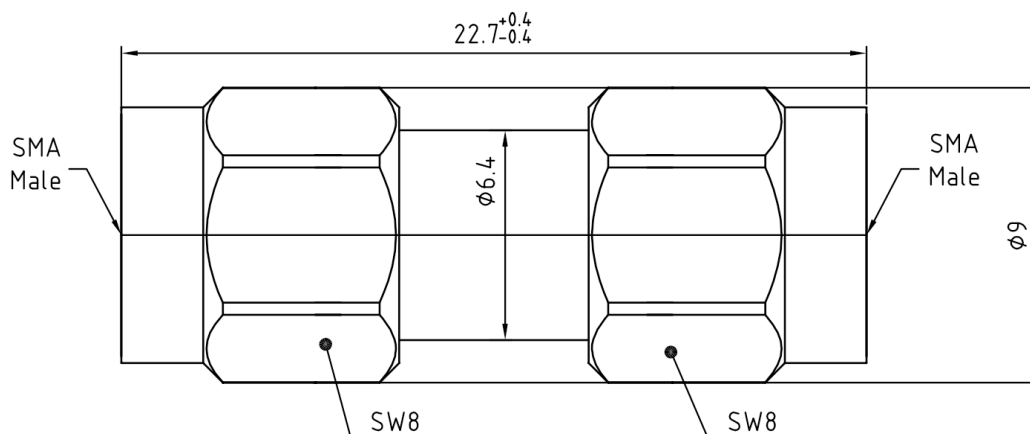

Electrical & Environmental

Frequency Range	9KHz-26.5GHz	Impedance	50 Ohm
VSWR	1.35 Max	Insertion Loss	0.8 dB Max
Voltage	50 Volts Max	Input Avg Power	-

Mechanical & Product Information

Product Number	RBK27S50MML, H-Grade	Connector	SMA Male to SMA Male
Connector Body	Passivated stainless steel	Center Contact	Gold plated brass
Net Weight	About 5.0g	RoHS	Compliant

Typical Test Data