




SMA Male to SMA Female Inner DC Block, [RBK27S50](#)
9KHz-26.5GHz, 50V

Dimensions(mm) Tolerance $\pm 1\%$

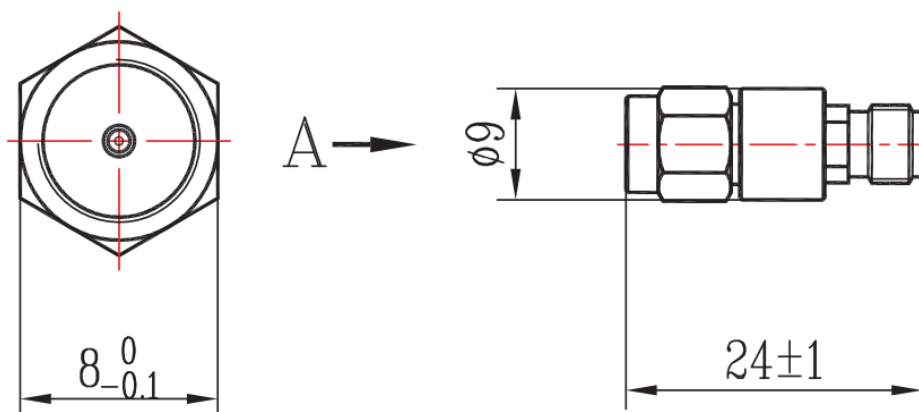

Electrical & Environmental

Frequency Range	9KHz-26.5GHz	Impedance	50 Ohm
VSWR	1.55 Max	Insertion Loss	1.0 dB Max
Voltage	50 Volts Max	Input Avg Power	2 Watts Max @25°C

Mechanical & Product Information

Product Number	RBK27S50, H-Grade	Connector	SMA Male to SMA Female
Connector Body	Passivated stainless steel	Center Contact	Gold plated brass, Gold plated beryllium copper
Net Weight	About 5.0g	RoHS	Compliant

Typical Test Data

