




## SSMP Male Full Detent to SSMP Female Inner DC Block, RBK27SP100 9KHz-26.5GHz, 100V

### Dimensions(mm) Tolerance±1%

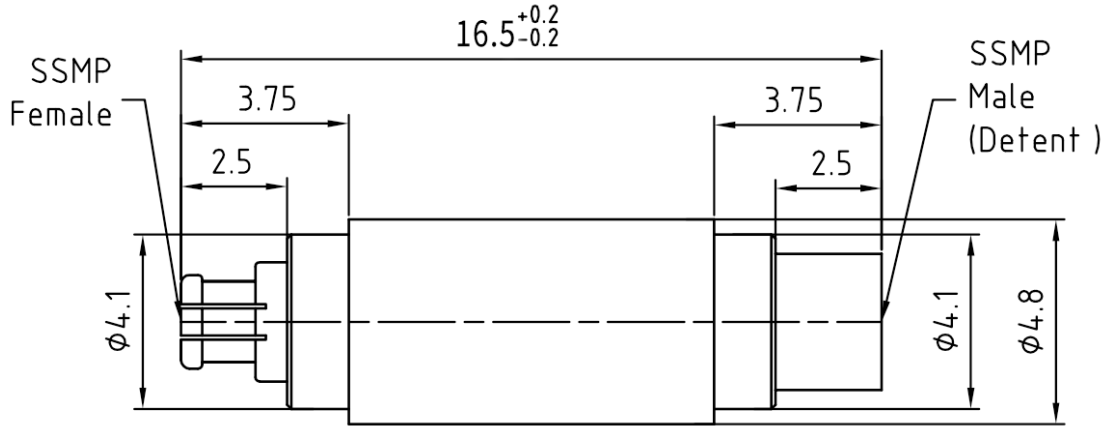

### Electrical & Environmental

<b>Frequency Range</b>	9KHz-26.5GHz	<b>Impedance</b>	50 Ohm
<b>VSWR</b>	1.5 Max	<b>Insertion Loss</b>	0.8 dB Max
<b>Voltage</b>	100 Volts Max	<b>Input Avg Power</b>	-

### Mechanical & Product Information

<b>Product Number</b>	RBK27SP100	<b>Connector</b>	SSMP(GPPO,SMPP) Male Full Detent to SSMP(GPPO,SMPP) Female
<b>Connector Body</b>	Passivated stainless steel, Gold plated brass, Gold plated beryllium copper	<b>Center Contact</b>	Gold plated brass, Gold plated beryllium copper
<b>Net Weight</b>	About 1.2g	<b>RoHS</b>	Compliant

### Typical Test Data

