




2.92mm(K,SK) Male to 2.92mm(K,SK) Female Inner DC Block, RBK40K100

9KHz-40GHz, 100V

Dimensions(mm) Tolerance $\pm 1\%$

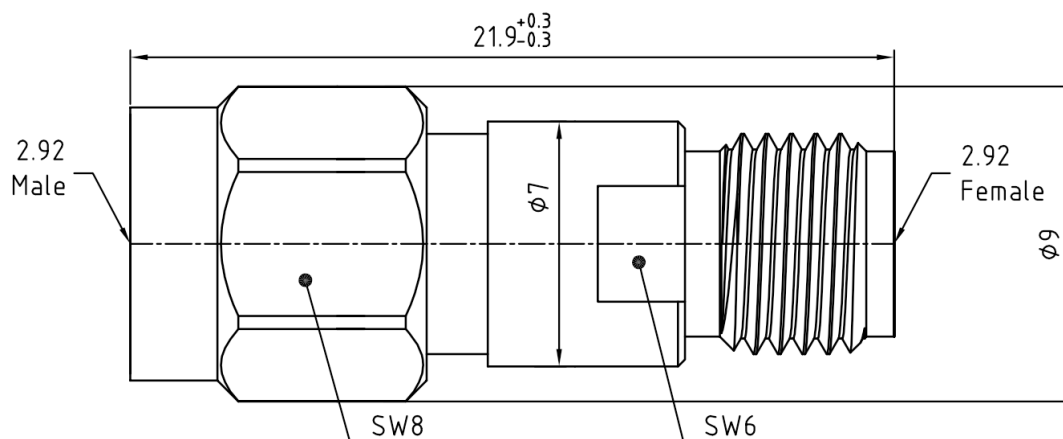

Electrical & Environmental

Frequency Range	9KHz-40GHz	Impedance	50 Ohm
VSWR	1.35 Max	Insertion Loss	1.0 dB Max
Voltage	100 Volts Max	Input Avg Power	-

Mechanical & Product Information

Product Number	RBK40K100, H-Grade	Connector	2.92mm(K,SK) Male to 2.92mm(K,SK) Female
Connector Body	Passivated stainless steel	Center Contact	Gold plated brass, Gold plated beryllium copper
Net Weight	About 4.6g	RoHS	Compliant

Typical Test Data

