




SSMP Male Full Detent to SSMP Female Inner DC Block, RBK40SP100 9KHz-40GHz, 100V

Dimensions(mm) Tolerance $\pm 1\%$

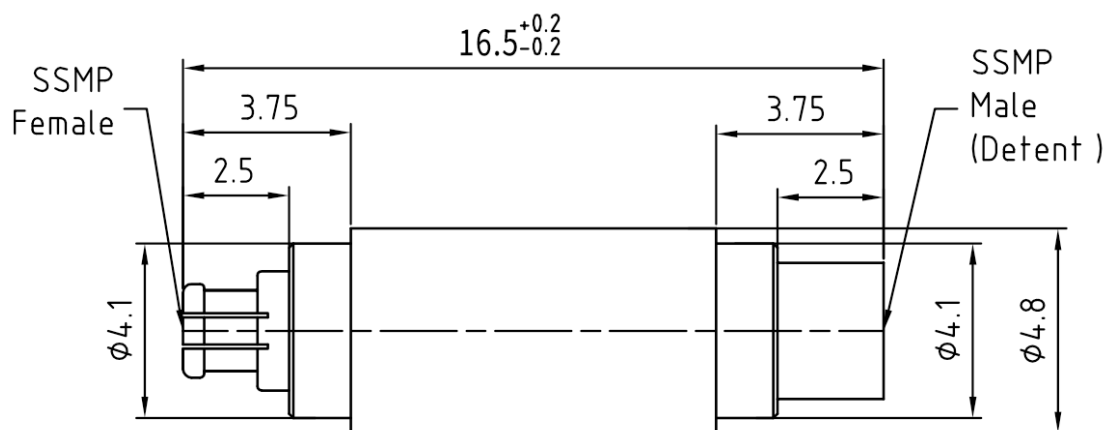

Electrical & Environmental

Frequency Range	9KHz-40GHz	Impedance	50 Ohm
VSWR	1.9 Max	Insertion Loss	1.6 dB Max
Voltage	100 Volts Max	Input Avg Power	-

Mechanical & Product Information

Product Number	RBK40SP100, H-Grade	Connector	SSMP(GPPO,SMPM) Male Full Detent to SSMP(GPPO,SMPM) Female
Connector Body	Passivated stainless steel, Gold plated brass, Gold plated beryllium copper	Center Contact	Gold plated brass, Gold plated beryllium copper
Net Weight	About 1.2g	RoHS	Compliant

Typical Test Data

