




2.4mm Male to 2.4mm Female Inner DC Block, RBK50U100

300KHz-50GHz, 100V

Dimensions(mm) Tolerance $\pm 1\%$

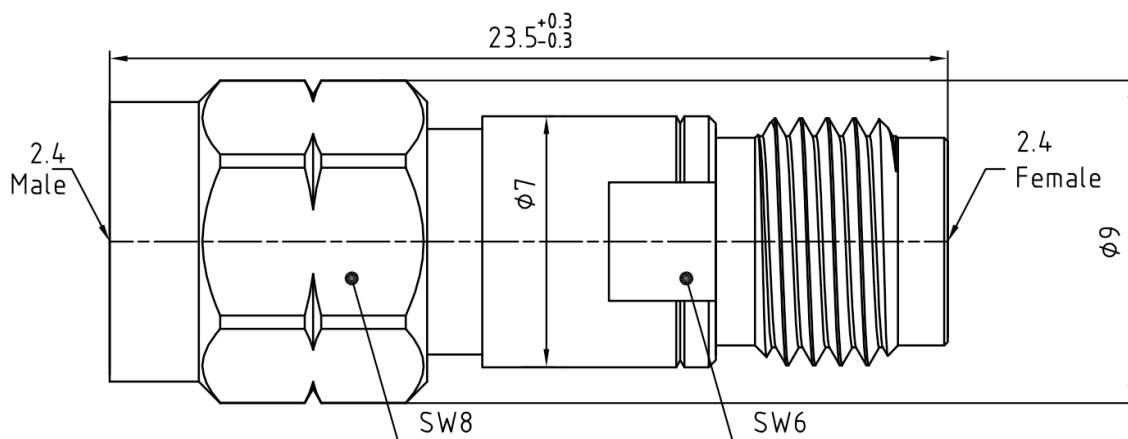

Electrical & Environmental

Frequency Range	300KHz-50GHz	Impedance	50 Ohm
VSWR	1.45 Max	Insertion Loss	1.0 dB Max
Voltage	100 Volts Max	Input Avg Power	-

Mechanical & Product Information

Product Number	RBK50U100, H-Grade	Connector	2.4mm Male to 2.4mm Female
Connector Body	Passivated stainless steel	Center Contact	Gold plated brass, Gold plated beryllium copper
Net Weight	About 4.9g	RoHS	Compliant

Typical Test Data

