


2.4mm Male to 2.4mm Female Inner DC Block, **RBK50U25** 9KHz-50GHz, 25V

Dimensions(mm) Tolerance $\pm 1\%$

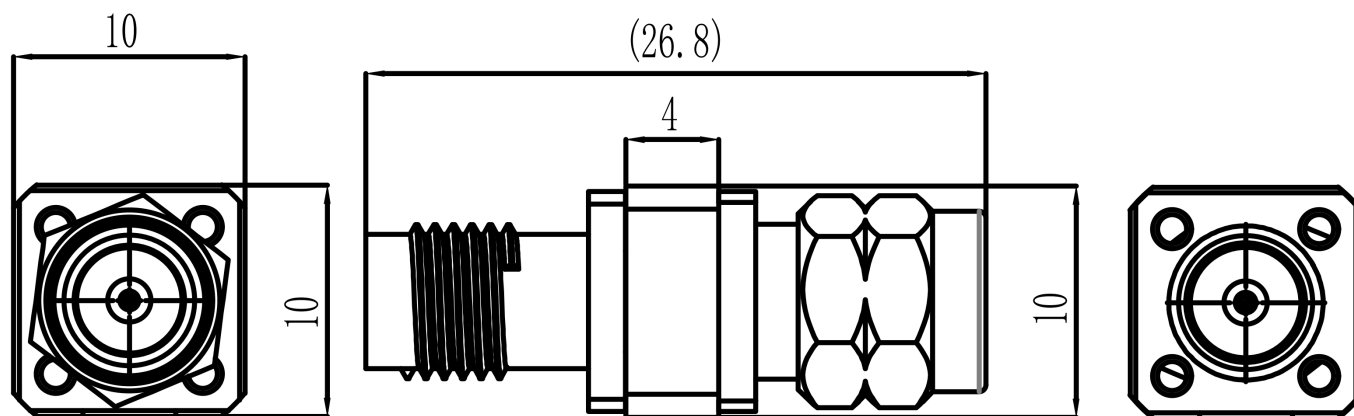

Electrical & Environmental

Frequency Range	9KHz-50GHz	Impedance	50 Ohm
VSWR	1.6 Max	Insertion Loss	1.0 dB Max
Voltage	25 Volts Max	Input Avg Power	1 Watts Max @25°C

Mechanical & Product Information

Product Number	RBK50U25, H-Grade	Connector	2.4mm Male to 2.4mm Female
Connector Body	Gold plated brass	Center Contact	Gold plated beryllium copper
Net Weight	-	RoHS	Compliant

Typical Test Data