




F Male to F Female Inner DC Block, RBM50F2F100

50MHz-2GHz, 100V

Dimensions(mm) Tolerance $\pm 1\%$

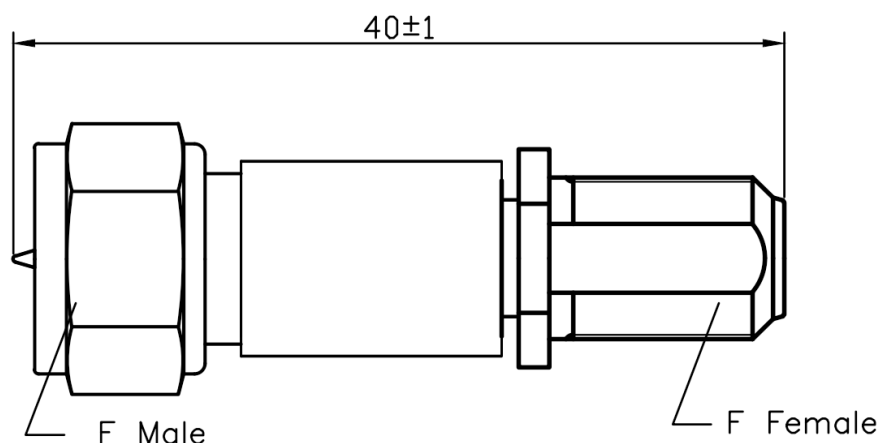

Electrical & Environmental

Frequency Range	50MHz-2GHz	Impedance	50 Ohm
VSWR	1.35 Max	Insertion Loss	0.6 dB Max
Voltage	100 Volts Max	Input Avg Power	-

Mechanical & Product Information

Product Number	RBM50F2F100, E-Grade	Connector	F Male to F Female
Connector Body	Passivated stainless steel 303/Nickel plated brass	Center Contact	Gold plated beryllium copper
Net Weight	-	RoHS	Compliant

Typical Test Data