




N Male to N Female Inner DC Block, **RBM50F3N100** 50MHz-3GHz, 100V

Dimensions(mm) Tolerance $\pm 1\%$

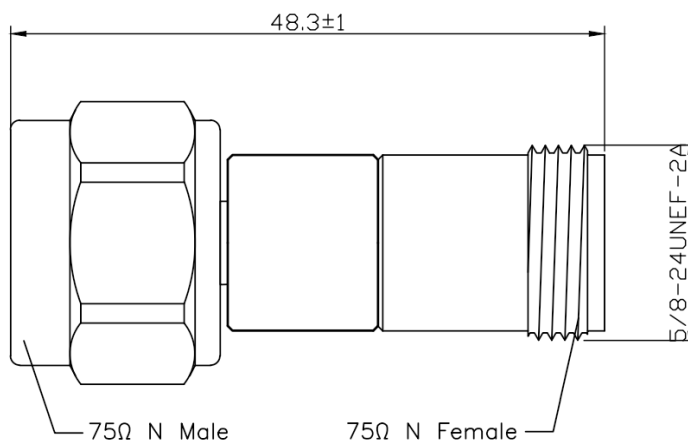

Electrical & Environmental

Frequency Range	50MHz-3GHz	Impedance	50 Ohm
VSWR	1.25 Max	Insertion Loss	0.3 dB Max
Voltage	100 Volts Max	Input Avg Power	-

Mechanical & Product Information

Product Number	RBM50F3N100, E-Grade	Connector	N Male to N Female
Connector Body	Passivated stainless steel 303	Center Contact	Gold plated beryllium copper
Net Weight	-	RoHS	Compliant

Typical Test Data