




## N Male to N Female Inner DC Block, RBM50F3N50 50MHz-3GHz, 100V

### Dimensions(mm) Tolerance $\pm 1\%$

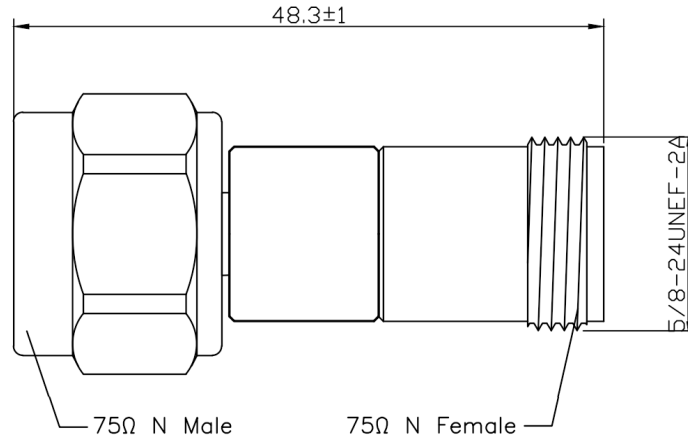

### Electrical & Environmental

<b>Frequency Range</b>	50MHz-3GHz	<b>Impedance</b>	50 Ohm
<b>VSWR</b>	1.25 Max	<b>Insertion Loss</b>	0.3 dB Max
<b>Voltage</b>	100 Volts Max	<b>Input Avg Power</b>	-

### Mechanical & Product Information

<b>Product Number</b>	RBM50F3N50, E-Grade	<b>Connector</b>	N Male to N Female
<b>Connector Body</b>	Passivated stainless steel 303	<b>Center Contact</b>	Gold plated beryllium copper
<b>Net Weight</b>	-	<b>RoHS</b>	Compliant

### Typical Test Data