


SMA Male to SMA Male Inner DC Block, RBNM27S050MM 10MHz-26.5GHz, 50V

Dimensions(mm) Tolerance $\pm 1\%$

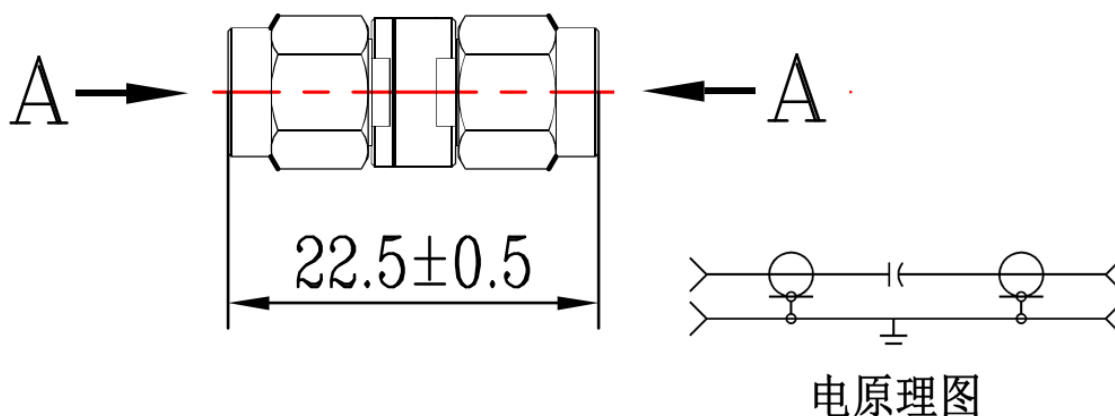

Electrical & Environmental

Frequency Range	10MHz-26.5GHz	Impedance	50 Ohm
VSWR	1.3 Max	Insertion Loss	0.6 dB Max
Voltage	50 Volts Max	Avg Power	2 Watts Max @25°C

Mechanical & Product Information

Product Number	RBNM27S050MM, P-Grade, Non-Magnetic	Connector	SMA Male to SMA Male
Connector Body	Gold plated brass	Center Contact	Gold plated beryllium copper
Net Weight	About 5.0g	RoHS	Compliant

Typical Test Data

