


RF Bias Tees SMA Male to Female RBT003S12 1-30MHz, DC 12V , 0.5A

Dimensions(mm) Tolerance±1%

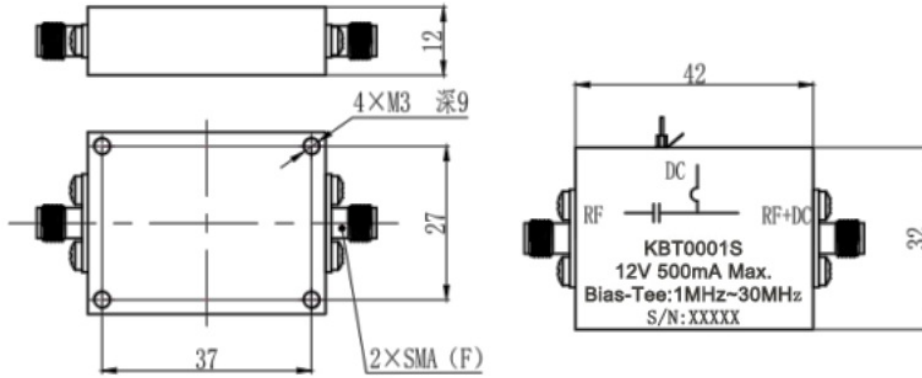

Electrical & Environmental

Frequency Range	1-30MHz	Impedance	50 Ohm
VSWR	1.25 Max	Insertion Loss	1.00 dB max
DC Voltage	12 Volts Max	DC Current	0.5 A Max

Mechanical

RF Connector	SMA Male to Female	DC Connector	PIN
Net Weight	About30g	RoHS	Compliant

Typical Test Data