


2.92mm(K,SK) Female to 2.92mm(K,SK) Female RF Bias Tees, RBT10M40S16 10-40GHz, DC 50V, 0.25A

Dimensions(mm) Tolerance $\pm 1\%$

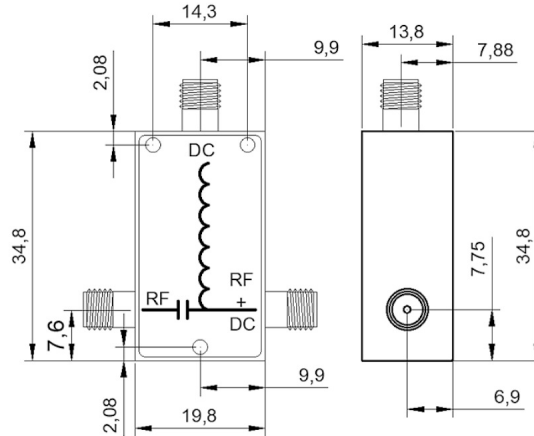

Electrical & Environmental

Frequency Range	10-40GHz	Impedance	50 Ohm
VSWR	1.7 Max	Insertion Loss	2.7 dB Max
Voltage	50 Volts Max	Avg Power	2 Watts Max @25°C
DC Voltage	50 Volts Max	DC Current	0.3 A Max
Isolation	38 dB Min	Group Delay	-

Mechanical & Product Information

Product Number	RBT10M40S16, P-Grade	Connector	2.92mm(K,SK) Female to 2.92mm(K,SK) Female, DC Port SMA Female
Connector Body	Passivated stainless steel	Center Contact	Gold plated beryllium copper
Net Weight	About 30.0g	RoHS	Compliant

Typical Test Data