




RF Bias Tees SMA Female to Female **RBT10S25** 10MHz-10GHz, DC 25V , 0.17A

Dimensions(mm) Tolerance±1%

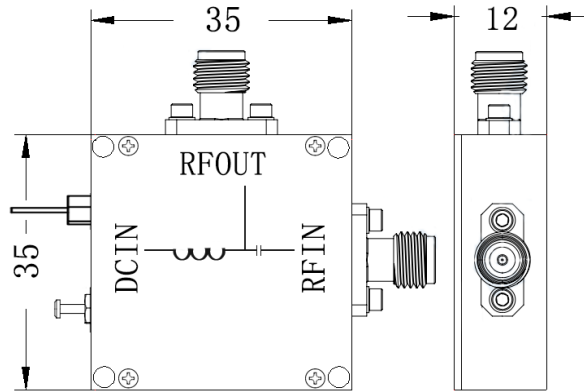

Electrical & Environmental

Frequency Range	10MHz-10GHz	Impedance	50 Ohm
VSWR	1.6 Max	Insertion Loss	2.00 dB max Typ:0.3dB
DC Voltage	25 Volts Max	DC Current	0.2 A Max

Mechanical

RF Connector	SMA Female to Female	DC Connector	PIN
Connector Body	Ternary alloy plated brass	Center Contact	Gold plated beryllium copper
Net Weight	About33.4g	RoHS	Compliant

Typical Test Data