




SMA Female to SMA Female RF Bias Tees, RBT12S50-2A

100MHz-12GHz, DC 50V, 2A

Dimensions(mm) Tolerance $\pm 1\%$

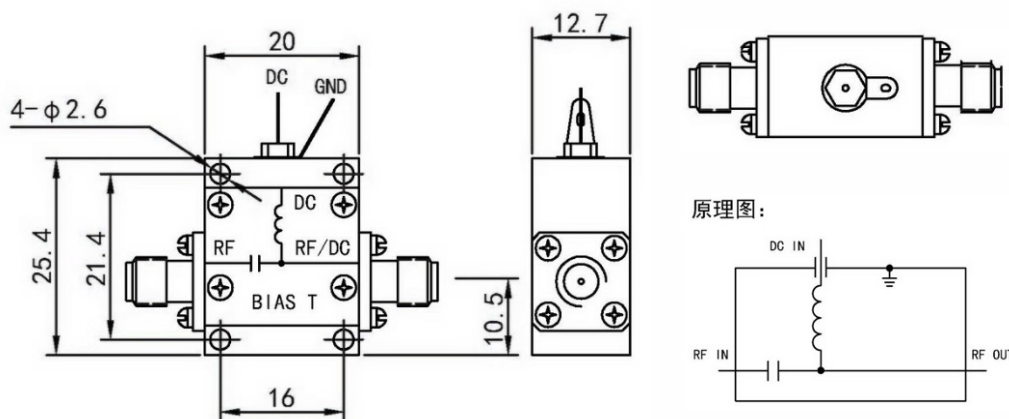

Electrical & Environmental

Frequency Range	100MHz-12GHz	Impedance	50 Ohm
VSWR	1.7 Max	Insertion Loss	2.0 dB Max
Voltage	-	Input Avg Power	2 Watts Max @25°C
DC Voltage	50 Volts Max	DC Current	2.0 A Max
Isolation	25 dB Min	Group Delay	-

Mechanical & Product Information

Product Number	RBT12S50-2A	Connector	SMA Female to SMA Female, DC Port PIN
Connector Body	Passivated stainless steel	Center Contact	-
Net Weight	About 19.8g	RoHS	Compliant

Typical Test Data

