




N Male to N Female RF Bias Tees, RBT3N50-3A 10MHz-3GHz, DC 50V, 3A

Dimensions(mm) Tolerance $\pm 1\%$

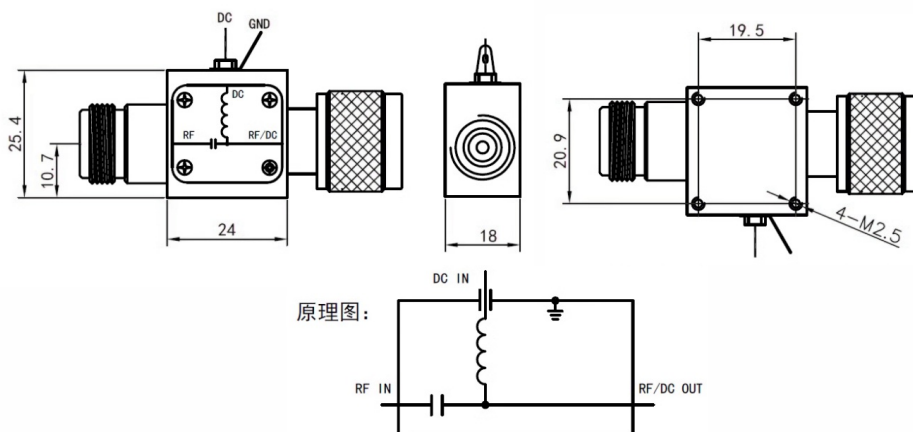

Electrical & Environmental

Frequency Range	10MHz-3GHz	Impedance	50 Ohm
VSWR	1.2 Max	Insertion Loss	1.0 dB Max
Voltage	-	Input Avg Power	1 Watts Max @25°C
DC Voltage	50 Volts Max	DC Current	3.0 A Max
Isolation	30 dB Min	Group Delay	-

Mechanical & Product Information

Product Number	RBT3N50-3A	Connector	N Male to N Female, DC Port PIN
Connector Body	Ternary alloy plated brass	Center Contact	-
Net Weight	About 67.6g	RoHS	Compliant

Typical Test Data

