


RF Bias Tees SMA Male to Female RBT3S50 5KHz-3GHz, DC 50V , 0.5A

Dimensions(mm) Tolerance±1%

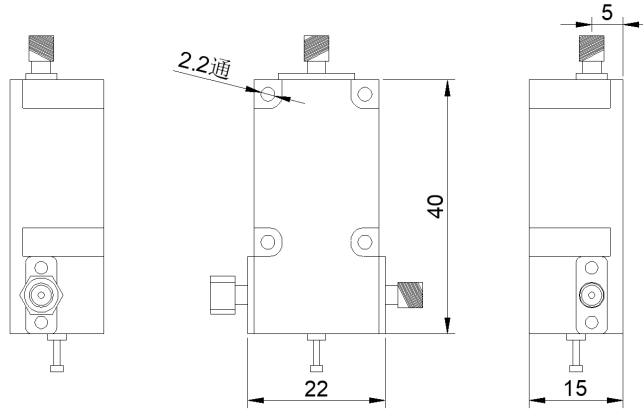

Electrical & Environmental

Frequency Range	5KHz-3GHz	Impedance	50 Ohm
VSWR	2 Max	Insertion Loss	1.50 dB max
Input Avg Power	2 Watts Max @25°C (Derate linearly to 0.2 Watt at 100°C), -45°C ~ +85°C		
DC Voltage	50 Volts Max	DC Current	0.5 A Max

Mechanical

RF Connector	SMA Male to Female	DC Connector	SMA Female
Net Weight	About40g	RoHS	Compliant

Typical Test Data