


2.92mm(K,SK) Female to 2.92mm(K,SK) Female RF Bias Tees,

RBT43K50

30KHz-43GHz, DC 50V, 0.5A

Dimensions(mm) Tolerance $\pm 1\%$

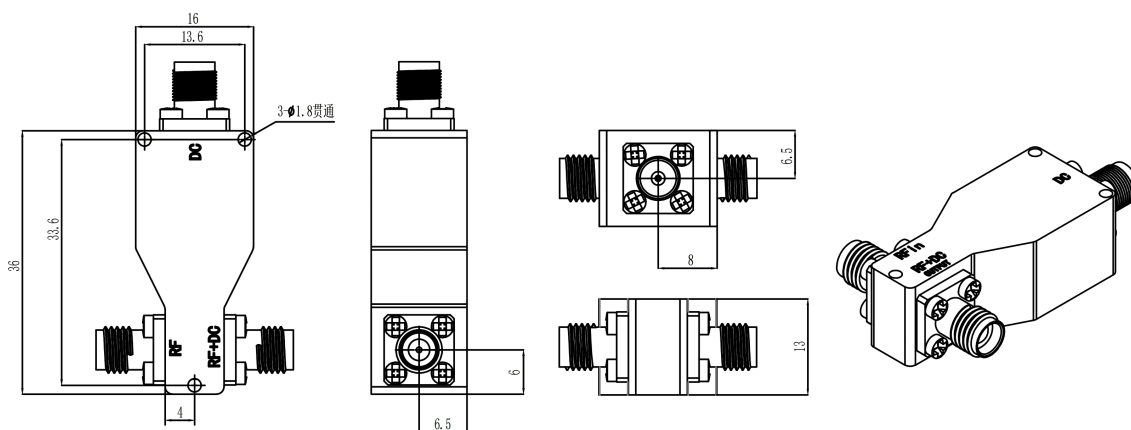

Electrical & Environmental

Frequency Range	30KHz-43GHz	Impedance	50 Ohm
VSWR	1.65 Max	Insertion Loss	3.0 dB Max , Typ 2.5dB
Voltage	-	Input Avg Power	1 Watts Max @25°C
DC Voltage	50 Volts Max	DC Current	0.5 A Max
Isolation	35 dB Min	Group Delay	-

Mechanical & Product Information

Product Number	RBT43K50, H-Grade	Connector	2.92mm(K,SK) Female to 2.92mm(K,SK) Female, DC Port SMA Female
Connector Body	Passivated stainless steel	Center Contact	-
Net Weight	-	RoHS	Compliant

Typical Test Data