


SMA Female to SMA Female RF Bias Tees, RBT500K1S100 500KHz-1GHz, DC 100V, 4A

Dimensions(mm) Tolerance $\pm 1\%$

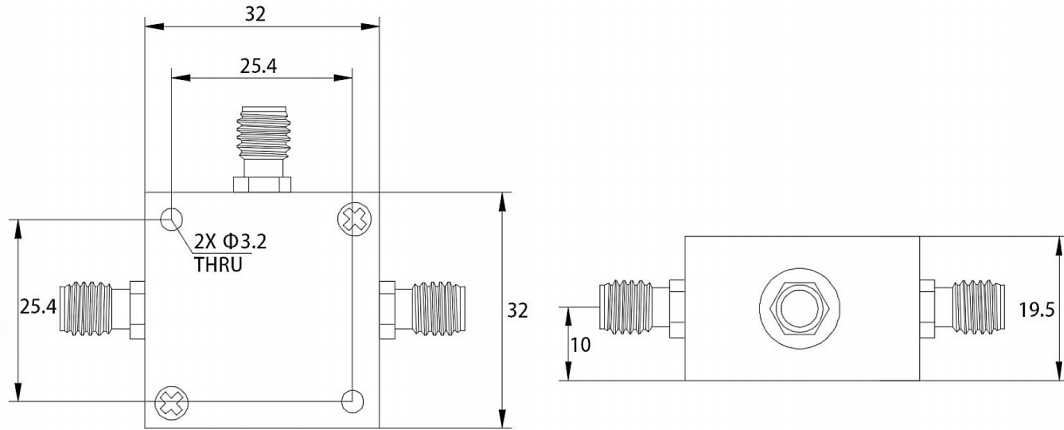

Electrical & Environmental

Frequency Range	500KHz-1GHz	Impedance	50 Ohm
VSWR	1.5 Max	Insertion Loss	1.5 dB Max , Typ 0.5dB
Voltage	100 Volts Max	Avg Power	10 Watts Max @25°C
DC Voltage	100 Volts Max	DC Current	4.0 A Max
Isolation	25 dB Min	Group Delay	-

Mechanical & Product Information

Product Number	RBT500K1S100, P-Grade	Connector	SMA Female to SMA Female, DC Port SMA Female
Connector Body	Passivated stainless steel	Center Contact	Gold plated beryllium copper
Net Weight	About 40.0g	RoHS	Compliant

Typical Test Data