


## RF Bias Tees 2.4mm Male to Female **RBT50U24** 30KHz-50GHz, DC 24V , 0.75A

### Dimensions(mm) Tolerance±1%

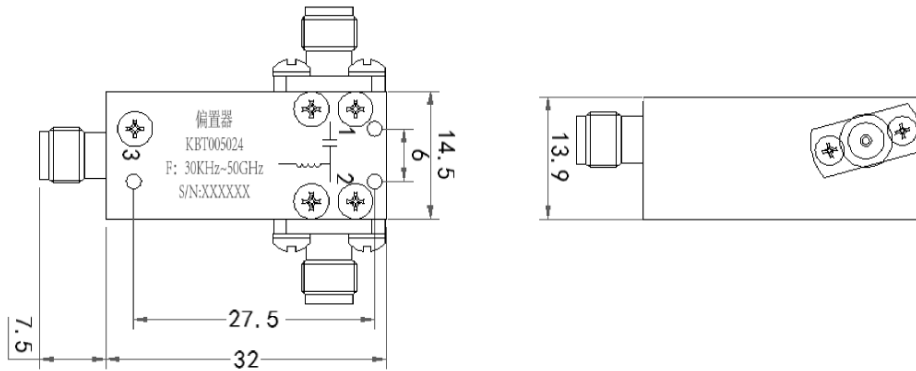

### Electrical & Environmental

<b>Frequency Range</b>	30KHz-50GHz	<b>Impedance</b>	50 Ohm
<b>VSWR</b>	2.2 Max	<b>Insertion Loss</b>	4.00 dB max Typ:2.5dB
<b>Input Avg Power</b>	2 Watts Max @25°C (Derate linearly to 0.2 Watt at 100°C), -40°C ~ +70°C		
<b>DC Voltage</b>	24 Volts Max	<b>DC Current</b>	0.8 A Max

### Mechanical

<b>RF Connector</b>	2.4mm Male to Female	<b>DC Connector</b>	SMA Female
<b>Net Weight</b>	About40g	<b>RoHS</b>	Compliant

### Typical Test Data