


2.4mm Female to 2.4mm Female RF Bias Tees, **RBT50U50** 10MHz-50GHz, DC 50V, 0.7A

Dimensions(mm) Tolerance $\pm 1\%$

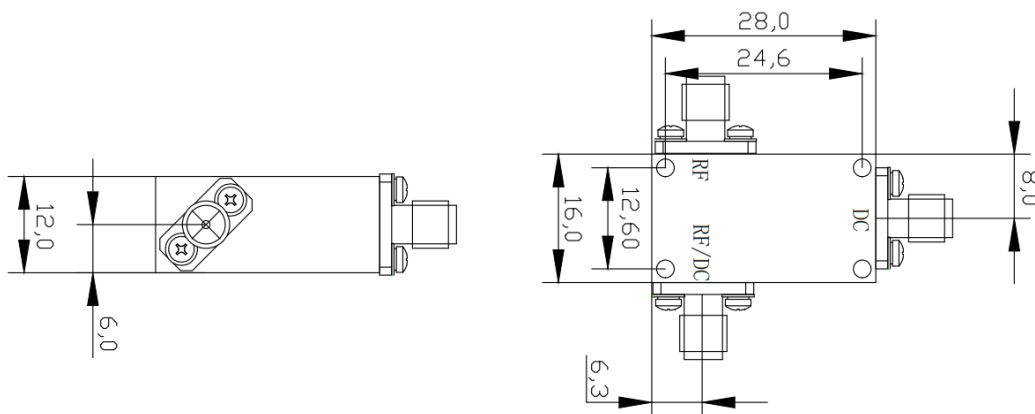

Electrical & Environmental

Frequency Range	10MHz-50GHz	Impedance	50 Ohm
VSWR	1.6 Max	Insertion Loss	3.0 dB Max
Voltage	-	Input Avg Power	1 Watts Max @25°C
DC Voltage	50 Volts Max	DC Current	0.7 A Max

Mechanical & Product Information

Product Number	RBT50U50, H-Grade	Connector	2.4mm Female to 2.4mm Female, DC Port 2.4mm Female
Connector Body	Gold plated brass	Center Contact	-
Net Weight	-	RoHS	Compliant

Typical Test Data