




1.85mm Female to 1.85mm Female RF Bias Tees, RBT67V25 100KHz-67GHz, DC 25V, 0.5A

Dimensions(mm) Tolerance±1%

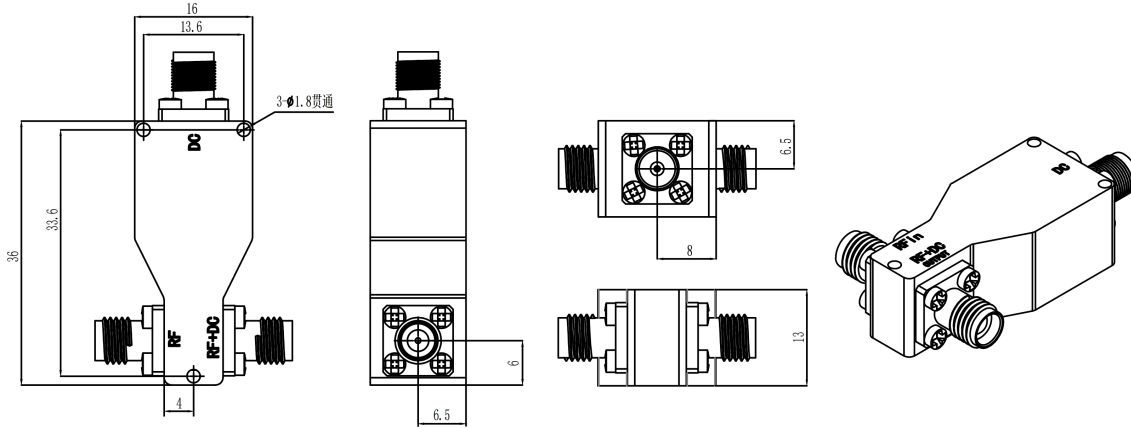

Electrical & Environmental

| | | | |
|------------------------|--------------|-----------------------|------------------------|
| Frequency Range | 100KHz-67GHz | Impedance | 50 Ohm |
| VSWR | 2 Max | Insertion Loss | 4.0 dB Max , Typ 3.5dB |
| Voltage | 25 Volts Max | Avg Power | 1 Watts Max @25°C |
| DC Voltage | 25 Volts Max | DC Current | 0.5 A Max |
| Isolation | 25 dB Min | Group Delay | - |

Mechanical & Product Information

| | | | |
|-----------------------|----------------------------|-----------------------|--|
| Product Number | RBT67V25, P-Grade | Connector | 1.85mm Female to 1.85mm Female, DC Port SMA Female |
| Connector Body | Passivated stainless steel | Center Contact | Gold plated beryllium copper |
| Net Weight | About 42.0g | RoHS | Compliant |

Typical Test Data

