




SMA Female to SMA Female RF Bias Tees, RBT6S32 10MHz-6GHz, DC 32V, 1A

Dimensions(mm) Tolerance $\pm 1\%$

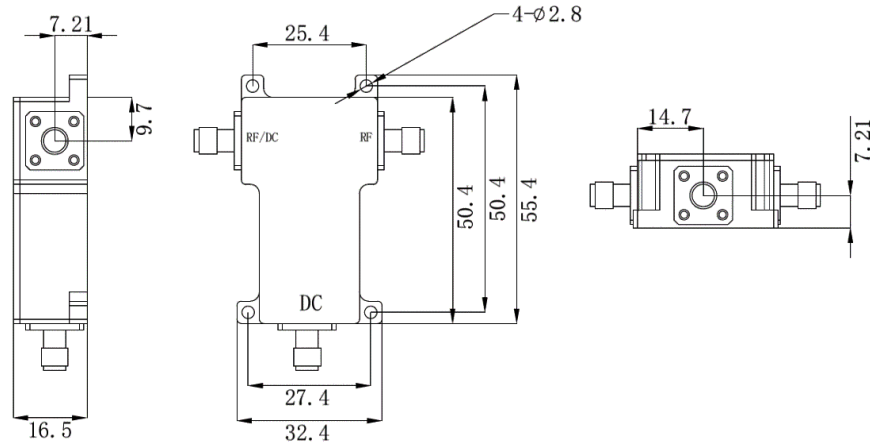

Electrical & Environmental

Frequency Range	10MHz-6GHz	Impedance	50 Ohm
VSWR	1.5 Max	Insertion Loss	1.2 dB Max Typ:0.8dB
Voltage	-	Input Avg Power	10 Watts Max @25°C
DC Voltage	32 Volts Max	DC Current	1.0 A Max
Isolation	55 dB Min	Group Delay	-

Mechanical & Product Information

Product Number	RBT6S32	Connector	SMA Female to SMA Female, DC Port SMA Female
Connector Body	Gold plated brass	Center Contact	-
Net Weight	About 20.0g	RoHS	Compliant

Typical Test Data