




SMA Female to SMA Female RF Bias Tees, RBT6S35-2

50MHz-6GHz, DC 35V, 1.2A

Dimensions(mm) Tolerance $\pm 1\%$

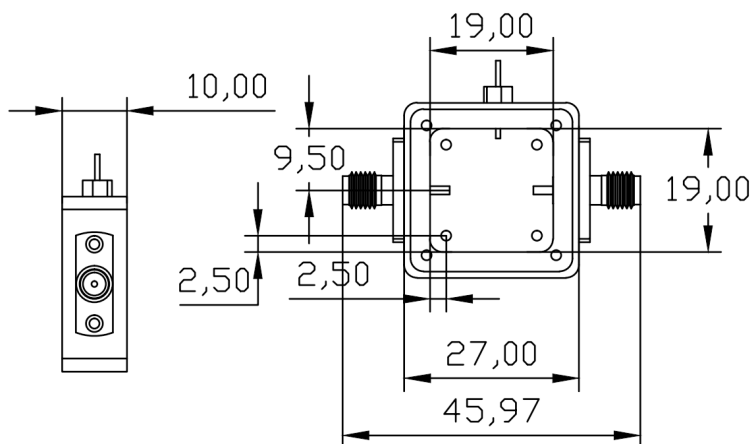

Electrical & Environmental

Frequency Range	50MHz-6GHz	Impedance	50 Ohm
VSWR	1.5 Max	Insertion Loss	1.2 dB Max
DC Voltage	35 Volts Max	DC Current	1.2 A Max

Mechanical & Product Information

Product Number	RBT6S35-2, E-Grade	Connector	SMA Female to SMA Female, DC Port PIN
Connector Body	Gold plated brass	Center Contact	-
Net Weight	About 19.8g	RoHS	Compliant

Typical Test Data