




RF Bias Tees SMA Female to Female **RBT6S35** 50MHz-6GHz, DC 35V , 0.31A

Dimensions(mm) Tolerance±1%

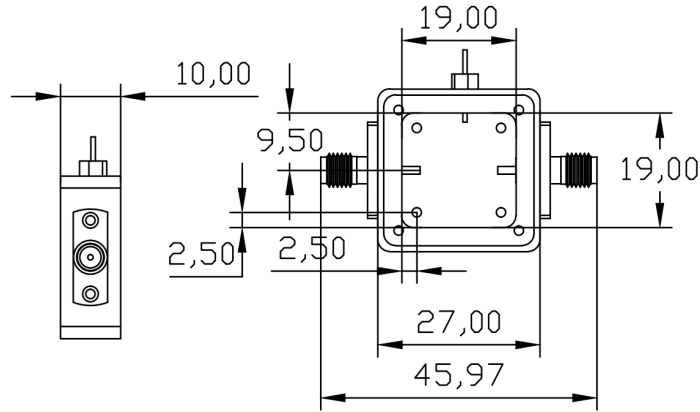

Electrical & Environmental

Frequency Range	50MHz-6GHz	Impedance	50 Ohm
VSWR	1.5 Max	Insertion Loss	0.80 dB max
DC Voltage	35 Volts Max	DC Current	0.3 A Max

Mechanical

RF Connector	SMA Female to Female	DC Connector	PIN
Connector Body	Ternary alloy plated brass	Center Contact	Gold plated beryllium copper
Net Weight	About19.8g	RoHS	Compliant

Typical Test Data