




RF Bias Tees SMA Female to Female RBT6S50-2 10MHz-6GHz, DC 50V , 0.5A

Dimensions(mm) Tolerance±1%

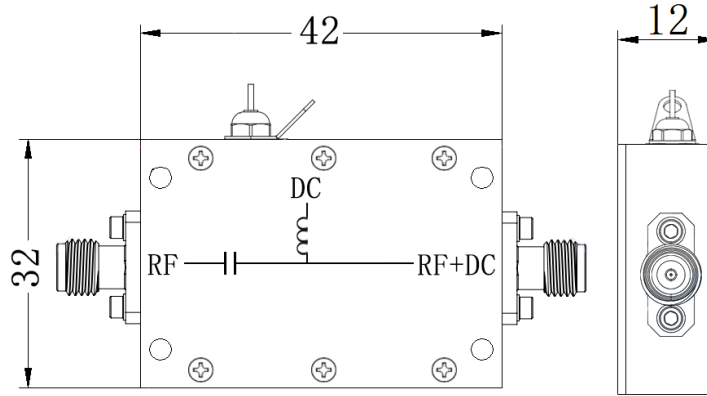

Electrical & Environmental

Frequency Range	10MHz-6GHz	Impedance	50 Ohm
VSWR	1.5 Max	Insertion Loss	1.20 dB max
DC Voltage	50 Volts Max	DC Current	0.5 A Max

Mechanical

RF Connector	SMA Female to Female	DC Connector	PIN
Connector Body	Ternary alloy plated brass	Center Contact	Gold plated beryllium copper
Net Weight	About36.5g	RoHS	Compliant

Typical Test Data